


## 20 to 50 W High Density CC Programmable Class 2 LED Driver with 0-10V and Tri-Mode™ Dimming (TRIAC, ELV, & 0-10 V), and With Optional Auxiliary Output


Input Voltage	Max. Output Power	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 - 277 Vac	50 W	up to 90% typical	90°C (measured at the hot spot)	< 20% @ max load	> 0.9	Programmable 0 - 10 V, Programmable TRIAC/ELV	1 - 100%	300 ms typical

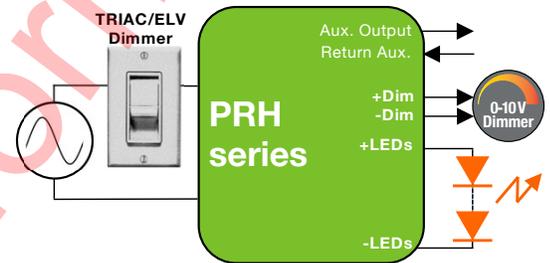

Application Diagram

### FEATURES

- Same footprint as the popular ESS series, but with a lower height
- Meets IEEE 1789-2015 “no impact” recommended practices for flicker
- Programmable dim-to-off for compliance with ANSI C137.1
- UL8750 Class P, Class 2 power supply
- Synchronized start-up: 100 ms
- IP20-rated case
- Lifetime: 50,000 hours @ Tc = 90°C, commonly used in IC (insulated ceiling) application
- 90°C maximum case hot spot temperature
- Surge protection:
  - IEC61000-4-5: 3 kV line to line/3 kV line to earth
  - 2.5 kV ring wave: ANSI/IEEE c62.41.1-2002 & c62.41.2-2002 category A
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®), and CA Title 24 technical requirements

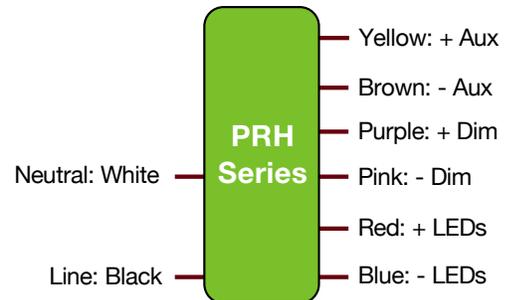

Wiring Diagram

### PROGRAMMING

- Audio jack programming
- 0-10V dimming profiles: Linear, Non-linear, Logarithmic
- Data log read: SKU, S/N, lot code, hours of operation, FW rev., power cycles

### APPLICATIONS

- Commercial & residential lighting
- Architectural lighting
- Indoor Lighting



## 20 to 50 W High Density CC Programmable Class 2 LED Driver with 0-10V and Tri-Mode™ Dimming (TRIAC, ELV, & 0-10 V), and With Optional Auxiliary Output

### 1 - ORDERING INFORMATION

Part Number	Input Voltage (Vac)	Max Output Power (W)	I <sub>out</sub> (mA) <sup>(1)</sup>	Default Programmed Current (mA)	V <sub>out</sub> Min. (Vdc)	V <sub>out</sub> Nom. (Vdc)	V <sub>out</sub> Max. (Vdc) <sup>(2)</sup>	Open Loop (No Load) Voltage (Vdc)	Notes
<b>Up to 20W</b>									
PRH-A20W-07-55-SZ	120 - 277	20	100 to 700	350	10	49.5	55	60	0-10V dimming only
PRH-A20W-07-55-SXZ	120 - 277	20	100 to 700	350	10	49.5	55	60	0-10V dimming only, Auxiliary output
PRH-A20W-07-55-ST	120 - 277	20	100 to 700	350	10	49.5	55	60	Tri-mode™ dimming
PRH-A20W-07-55-SXT	120 - 277	20	100 to 700	350	10	49.5	55	60	Tri-mode™ dimming, Auxiliary output
<b>21 to 30W</b>									
PRH-A30W-10-55-SZ	120 - 277	30	275 to 1050	700	10	49.5	55	60	0-10V dimming only
PRH-A30W-10-55-SXZ	120 - 277	30	275 to 1050	700	10	49.5	55	60	0-10V dimming only, Auxiliary output
PRH-A30W-10-55-ST	120 - 277	30	275 to 1050	700	10	49.5	55	60	Tri-mode™ dimming
PRH-A30W-10-55-SXT	120 - 277	30	275 to 1050	700	10	49.5	55	60	Tri-mode™ dimming, Auxiliary output
<b>31 to 50W</b>									
PRH-A50W-14-55-SZ	120 - 277	50	500 to 1400	1050	10	49.5	55	60	0-10V dimming only
PRH-A50W-14-55-SXZ	120 - 277	50	500 to 1400	1050	10	49.5	55	60	0-10V dimming only, Auxiliary output
PRH-A50W-14-55-ST	120 - 277	50	500 to 1400	1050	10	49.5	55	60	Tri-mode™ dimming
PRH-A50W-14-55-SXT	120 - 277	50	500 to 1400	1050	10	49.5	55	60	Tri-mode™ dimming, Auxiliary output

#### Notes:

(1) The ERP LED Driver Configuration Tool (ERP GUI) allows programming of the output current to values below the minimum limits specified in the table above. However, when the programmed output current is set below these minimum thresholds, the LED driver's Total Harmonic Distortion (THD) and Power Factor (PF) may not meet the values defined in the INPUT SPECIFICATION section of this datasheet. For proper operation, please also refer to the OPERATING ENVELOPE for each part number, which defines the permissible ranges of output current and output voltage where THD and PF compliance is maintained.

(2) The forward voltage (V<sub>f</sub>) of the LED load should not exceed V<sub>out</sub> Max. of the driver under worst case field operating conditions which are the V<sub>f</sub> max. of the LED load under lowest temperature and highest forward current conditions. As a general design guideline, the nominal LED load V<sub>f</sub> measured at the operating current and at room temperature should be ≤ V<sub>out</sub> Nom. of the driver.

### 20 to 50 W High Density CC Programmable Class 2 LED Driver with 0-10V and Tri-Mode™ Dimming (TRIAC, ELV, & 0-10 V), and With Optional Auxiliary Output

#### ACCESSORIES

Notes:

- Please order the programming cable using part number PROG-JACK-USB.

#### Programming Cable


Part number: *PROG-JACK-USB*



Preliminary Information

**20 to 50 W High Density CC Programmable Class 2 LED Driver with 0-10V and Tri-Mode™ Dimming (TRIAC, ELV, & 0-10 V), and With Optional Auxiliary Output**

**2 – OPERATING ENVELOPES**

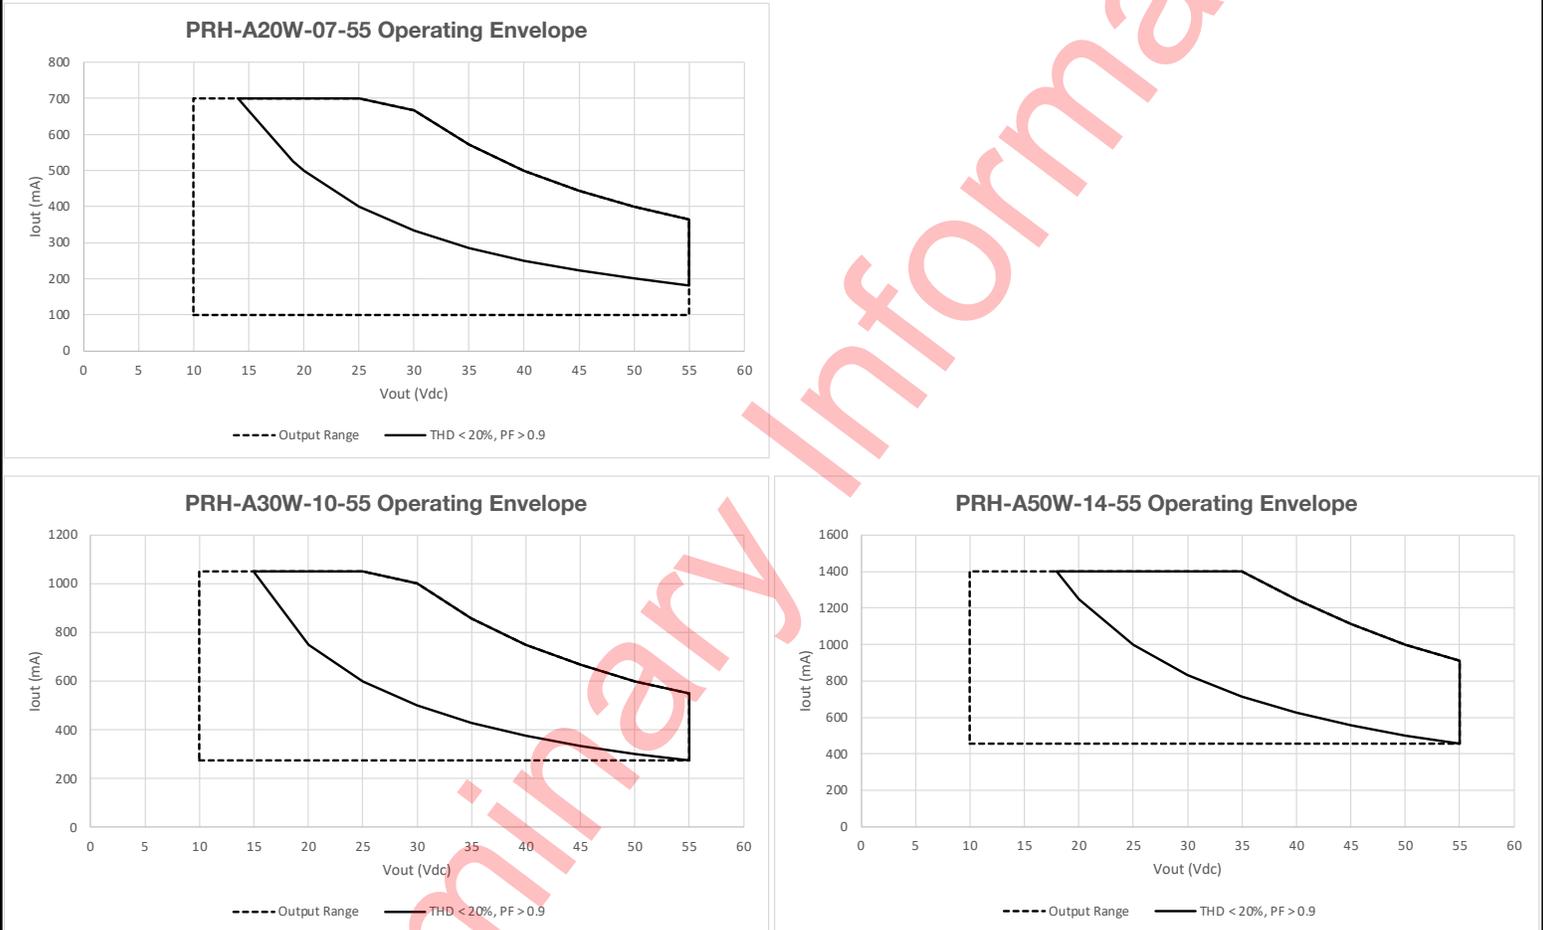

**Figure 1**

## 20 to 50 W High Density CC Programmable Class 2 LED Driver with 0-10V and Tri-Mode™ Dimming (TRIAC, ELV, & 0-10 V), and With Optional Auxiliary Output

### 3 - INPUT SPECIFICATION (@25°C ambient temperature)

	Units	Minimum	Typical	Maximum	Notes
<b>Input Voltage Range (Vin)</b>	Vac	108	120, 277	305	<ul style="list-style-type: none"> <li>The rated output current for each model is achieved at <math>V_{in} \geq 108</math> Vac, and at <math>V_{in} \geq 249</math> Vac.</li> <li>At nominal load</li> </ul>
<b>Input Frequency Range</b>	Hz	47	50/60	63	
<b>Input Current (Iin)</b>	A			0.5 A @ 120 Vac 0.25 A @ 277 Vac	
<b>Power Factor (PF)</b>		0.9	> 0.9		<ul style="list-style-type: none"> <li>At nominal input voltage (120 &amp; 277 Vac) and no dimmer</li> <li>From 100% to 60% of output power (from 100% to 70% for PRH-A20 models)</li> </ul>
<b>Inrush Current</b>	A	Meets NEMA-410 requirements			At any point on the sine wave and 25°C
<b>Leakage Current</b>	mA			0.4 mA @ 120 Vac 0.75 mA @ 277 Vac	Measured per IEC60950-1
<b>Input Harmonics</b>	Complies with IEC61000-3-2 for Class C equipment				
<b>Total Harmonics Distortion (THD)</b>				20%	<ul style="list-style-type: none"> <li>At nominal input voltage (120 &amp; 277 Vac)</li> <li>From 100% to 60% of output power from 100% to 70% for PRH-A20 models</li> <li>Complies with DLC (Design Light Consortium) technical requirements</li> </ul>
<b>Efficiency</b>	%	-	up to 90%	-	Measured with nominal input voltage, a full sinusoidal wave form and without dimmer attached.
<b>Standby Power</b>	mW			500 1000	<ul style="list-style-type: none"> <li>At 120 Vac</li> <li>At 277 Vac</li> </ul>
<b>Isolation</b>	The AC input to the main DC output is isolated.				

## 20 to 50 W High Density CC Programmable Class 2 LED Driver with 0-10V and Tri-Mode™ Dimming (TRIAC, ELV, & 0-10 V), and With Optional Auxiliary Output

### 4 - MAIN OUTPUT SPECIFICATION (@25°C ambient temperature)

	Units	Minimum	Typical	Maximum	Notes
<b>Output Voltage (Vout)</b>	Vdc				•See ordering information for details
<b>Output Current (Iout)</b>	mA				•See ordering information for details •Output voltage and current combination cannot exceed max power output. See section 2 for operating window •The rated output current for each model is achieved at $V_{in} \geq 108$ Vac & $V_{in} \geq 249$ Vac.
<b>Output Current Regulation</b>	%	-5	±2	5	•At nominal AC line voltage (120 & 277 Vac) •Includes load and current set point variations
<b>Output Current Overshoot</b>	%	-	-	20	The driver does not operate outside of the regulation requirements for more than 500 ms during power on with nominal LED load and without dimmer.
<b>Ripple Current</b>	≤ 10% of max output current for each model				•Measured at nominal LED voltage and nominal input voltage without dimming •Calculated in accordance with the IES Lighting Handbook, 9th edition •Compliant with IEEE1789-2015. Meets "No Impact" levels
<b>Dimming Range</b>	%	1		100	•The dimming range is dependent on each specific dimmer. It may not be able to achieve 1% dimming with some dimmers. •When testing, if light is measured, dimming range is based on light output. If no light is measured, dimming range is based on percentage of output current. •Dimming performance is optimal when the driver is operated at its nominal output voltage matching the LED nominal Vf (forward voltage). Dimming performance may vary when the driver is operated near its minimum output voltage.
<b>Start-up Time</b>	ms		300	500	•Without any dimmer attached, and at nominal input voltages and nominal load •Synchronized start-up of 100 ms when multiple drivers on same circuit •Measured from application of AC line voltage to 100% light output •Complies with ENERGY STAR® luminaire specification and CA Title 24
<b>Isolation</b>	The main DC output is certified and tested per UL8750 Class 2.				

### 5 - AUXILIARY OUTPUT: "-SXZ" & "-SXT" MODELS ONLY (@25°C ambient temperature)

	Units	Minimum	Typical	Maximum	Notes
<b>Auxiliary Output Voltage</b>	Vdc	9.5	12	24	•Default value is 12 V •+/-20% voltage regulation •Configurable through programming in 0.5 V increments
<b>Auxiliary Output Power</b>	W			1.2	

## 20 to 50 W High Density CC Programmable Class 2 LED Driver with 0-10V and Tri-Mode™ Dimming (TRIAC, ELV, & 0-10 V), and With Optional Auxiliary Output

### 6 - DEFAULT 0-10 V DIMMING PROFILE (@25°C ambient temperature)


Using the ERP LED Driver Configuration Tool (ERP GUI), users can select from several 0-10V dimming profiles, including a logarithmic profile, an ANSI C137.1-compliant profile, and non-linear profiles with either 1% or 10% minimum dimming, each available with or without dim-to-off.

Dim-to-off can be enabled or disabled independently, and a fully user-defined dimming profile can also be created, allowing precise programming of every point along the dimming curve.

By default, the PLH series is pre-loaded with the non-linear profile featuring 1% minimum dimming with dim-to-off, as shown in Figure 1.

	Units	Minimum	Typical	Maximum	Notes
<b>Default Dimming Profile (see figure 1)</b>		100% of output current between 10 V and 8 V, Linear between 8 V and 1 V, 1% of output current below 1 V.			
<b>Dimming Range</b>	%	1		100	When testing, if light is measured, dimming range is based on light output. If no light is measured, dimming range is based on percentage of output current.
<b>High Level Voltage - A</b>	V		8.0		
<b>Low Level Voltage - B</b>	V		1.0		
<b>Dim to Off - C</b>	V		0.7		
<b>Dim to On - D</b>	V		0.9		
<b>Current Supplied by the +Dim Signal Pin</b>	mA			0.5	
<b>Dimming Voltage Sensing Tolerance</b>	mV			100	The tolerance of the difference between the 0-10 V signal supplied by the dimmer and sensed by the driver.
<b>Output Current Tolerance While Being Dimmed</b>	%		±8		In the linear region of the dimming curve (between points A and B in Figure 1).
<b>Output Current Tolerance at Minimum Dimming</b>	%		±8		The tolerance of the output current at minimum dimming is +/-8% of 1% of the maximum output current of each driver.
<b>Isolation</b>	The 0-10 V circuit is isolated from the AC input and meets UL8750 supplement SF requirements.				

Figure 1

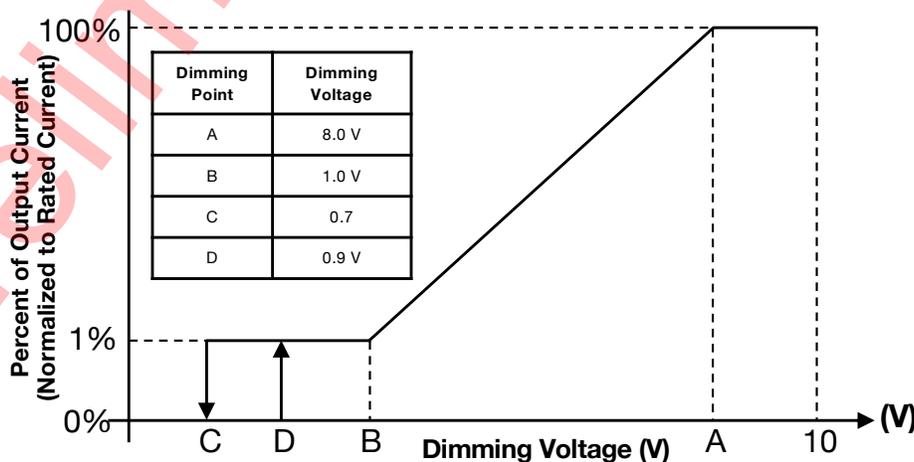

## 20 to 50 W High Density CC Programmable Class 2 LED Driver with 0-10V and Tri-Mode™ Dimming (TRIAC, ELV, & 0-10 V), and With Optional Auxiliary Output

### 7 - ENVIRONMENTAL CONDITIONS

	Units	Minimum	Typical	Maximum	Notes
<b>Operating Ambient Temperature (Ta)</b>	°C	-40		50	50°C is the non-derated temperature (Refer to section 10 'Output power de-rating at elevated temperatures'.)
<b>Maximum Case Temperature (Tc)</b>	°C			+90	Case temperature measured at the hot spot •tc (see label on page 17)
<b>Storage Temperature</b>	°C	-40		+85	
<b>Humidity</b>	%	5	-	95	Non-condensing
<b>Cooling</b>	Convection cooled				
<b>Acoustic Noise</b>	dBA			24	Measured at a distance of 1 foot, with dimmer
<b>Mechanical Shock Protection</b>	per EN60068-2-27				
<b>Vibration Protection</b>	per EN60068-2-6 & EN60068-2-64				
<b>MTBF</b>	> 200,000 hours when operated at nominal input and output conditions, and at Tc ≤ 75°C				
<b>Lifetime</b>	50,000 hours @ Tc = 90°C with heatsink, commonly used in IC (insulated ceiling) application				
<b>Warranty</b>	5 years. Users must utilize proper thermal management techniques to ensure proper thermal conductivity between the driver and heat sink. The use of double-sided tape to mount the driver voids the warranty.				

### 8 - EMC COMPLIANCE, SAFETY, AND ENVIRONMENTAL APPROVALS

EMC Compliance					
<b>Conducted and Radiated EMI</b>	•Compliant with FCC CFR Title 47 Part 15 Class B at 120 & Class A 277 Vac				
<b>Voltage Fluctuations &amp; Flicker</b>	IEC61000-3-3				
<b>Immunity Compliance</b>	<b>ESD (Electrostatic Discharge)</b>	IEC61000-4-2	6 kV contact discharge, 8 kV air discharge, level 3		
	<b>RF Electromagnetic Field Susceptibility</b>	IEC61000-4-3	3 V/m, 80 - 1000 MHz, 80% modulated at a distance of 3 meters		
	<b>Electrical Fast Transient</b>	IEC61000-4-4	± 2 kV on AC power port for 1 minute, ±1 kV on signal/control lines		
	<b>Surge</b>	IEC61000-4-5	± 3 kV line to line (differential mode) /± 3 kV line to common mode ground		
	<b>Conducted RF Disturbances</b>	IEC61000-4-6	ANSI/IEEE c62.41.1-2002 & c62.41.2-2002 category A, 2.5 kV ring wave		
	<b>Voltage Dips</b>	IEC61000-4-11	>95% dip, 0.5 period; 30% dip, 25 periods; 95% reduction, 250 periods		
Safety & Environmental Approvals					
<b>UL</b>	UL8750 Class P/Class 2 power supply				
<b>cUL</b>	CAN/CSA C22.2 No. 250.13-14 LED equipment for lighting applications				
Safety					
	Units	Minimum	Typical	Maximum	Notes
<b>Hi Pot (High Potential) or Dielectric voltage-withstand</b>	Vdc	2200			•Tested at the RMS voltage equivalent of 1555 Vac

## 20 to 50 W High Density CC Programmable Class 2 LED Driver with 0-10V and Tri-Mode™ Dimming (TRIAC, ELV, & 0-10 V), and With Optional Auxiliary Output

### 9 - DIMMING FEATURES

#### Synchronized Start-up

The PRH series incorporates a synchronized start-up feature. When wired into the same dimmer, multiple PRH series drivers will dim to the same level and turn on within 100 ms of each other.

#### Fully Programmable Dimming Curve

In the PRH series, several 0-10V dimming profiles can be selected, such as a logarithmic profile, a non-linear profile with 1% minimum dimming, and a non-linear profile with 10% minimum dimming. Furthermore, every point in the non-linear dimming profile can be programmed using the programming software.

### 10 - PROTECTION FEATURES

#### Input Over Current Protection

The PRH series incorporates a primary AC line fuse for input over current protection to prevent damage to the LED driver and meet product safety requirements as outlined in Section 6.

#### Short Circuit and Over Current Protection

The PRH series is protected against short-circuit such that a short from any output to return shall not result in a fire hazard or shock hazard. The driver shall hiccup as a result of a short circuit or over current fault. Removal of the fault will return the driver to within normal operation. The driver shall recover, with no damage, from a short across the output for an indefinite period of time.

#### Internal Over temperature Protection

The PRH series is equipped with internal temperature sensor on the primary power train. Failure to stay within the convection power rating will result in the power supply reducing the available current (fold back) below the programmed amount. The main output current will be restored to the programmed value when the temperature of the built-in temperature sensor cools adequately.

#### Output Open Load Protection

When the LED load is removed, the output voltage of the PRH series is typically limited to 60 V, to meet Class 2 standard.

#### 0-10V Dimming Circuit Protection

The 0-10V dimming circuit includes built-in protection against accidental mis-wiring, preventing damage even if AC line voltage is mistakenly connected to the dimming leads at any nominal input voltage.

### 11 - OUTPUT POWER DE-RATING AT ELEVATED TEMPERATURES

The PRH series can be operated with cooling air temperatures above 50°C by linearly de-rating the total maximum output power (or current) by 2.5%/°C until internal over temperature protection activates.

## 20 to 50 W High Density CC Programmable Class 2 LED Driver with 0-10V and Tri-Mode™ Dimming (TRIAC, ELV, & 0-10 V), and With Optional Auxiliary Output

### 12 - PHASE-CUT DIMMING

The PRH series offers Tri-Mode Dimming™ compatibility with both phase-cut (reverse-phase/trailing-edge or forward-phase/leading-edge) and 0-10V dimmers. Phase-cut and 0-10V dimming cannot be used at same time.

Phase-cut dimming of the driver is possible with standard TRIAC-based (forward-phase or leading-edge) dimmers or with ELV (reverse-phase/trailing-edge) dimmers that chop the AC voltage as shown in Figure 3.

During the rapid rise time of the AC voltage when the dimmer turns on, the driver does not generate any current and inrush current is controlled. During the on-time of the AC input, the driver regulates the output current based upon the conduction angle. The RMS value of the driver's output current is proportional to the on-time of the AC input voltage. When operating with an incandescent dimmer, the RMS output current varies depending upon the conduction angle and RMS value of the applied AC input voltage. Figure 4 shows the typical output current versus conduction angle at the nominal input voltage. Operation throughout this dimming range is monotonic and produces a smooth transition of light output in both directions of the dimming range.

Forward-phase (TRIAC) and reverse-phase (ELV) dimming work only at 120 Vac.

The typical minimum dimming angle for startup is 45 degrees.

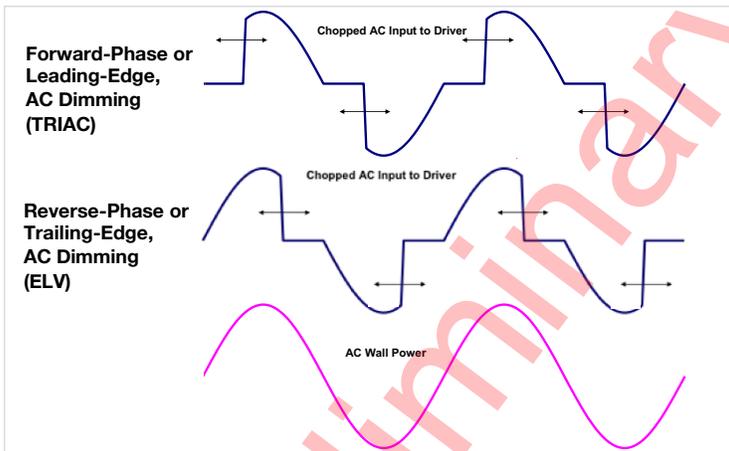


Figure 3

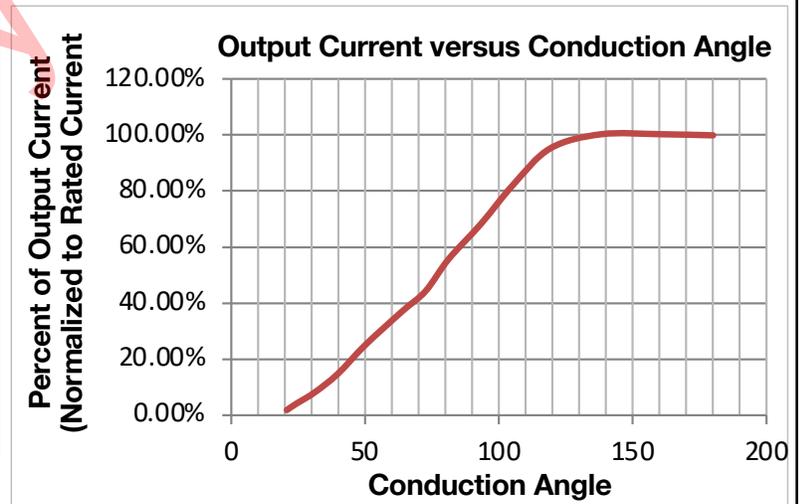


Figure 4

### COMPATIBLE PHASE-CUT DIMMERS

Lutron		Lutron		Cooper
TRIAC	TRIAC	ELV	ELV	TRIAC
S600P	DVELV303P	IPI06-1LZ	VPE06	AAL06A
SCL-153P	SELV300P	6161		DLA06P
DVCL153P	MAELV600	6673-IW		
DV600P	FAELV500			
TGCL153P				

## 20 to 50 W High Density CC Programmable Class 2 LED Driver with 0-10V and Tri-Mode™ Dimming (TRIAC, ELV, & 0-10 V), and With Optional Auxiliary Output

### 12 - PHASE-CUT DIMMING (CONTINUED)

The PRH series offers the ability to customize conduction angles for high performance TRIAC/ELV dimming through ERP's LED Driver Configuration Tool, downloadable through the ERP website (<https://www.erp-power.com/erp-light-engines/led-light-programming-software/>). While using the tool, users can select either the "ERP - Default" dimming profile (figure 5) which contains dimming parameters designed to work with a wide array of phase-cut dimmers, or users can use the tool to program custom conduction angles using the "Programmable - User-Defined" dimming profile (figure 6). Additionally, the custom conduction angle feature can enable or disable the use of dim-to-off conduction angles.



Figure 5

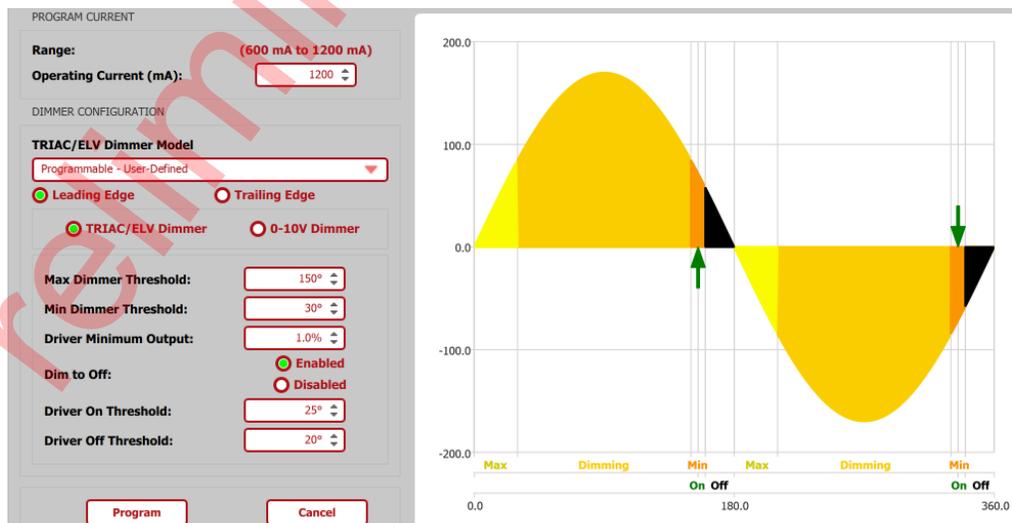


Figure 6

## 20 to 50 W High Density CC Programmable Class 2 LED Driver with 0-10V and Tri-Mode™ Dimming (TRIAC, ELV, & 0-10 V), and With Optional Auxiliary Output

### 13 - 0-10 V DIMMING

The PRH series operate only with 0-10 V dimmers that sink current. They are not designed to operate with 0-10 V control systems that source current, as used in theatrical/entertainment systems. Developed in the 1980's, the 0-10 V sinking current control method is adopted by the International Electrotechnical Commission (IEC) as part of its IEC Standard 60929 Annex E.

The method to dim the output current of the driver is done via the +Dim/-Dim Signal pins. The +Dim/-Dim Signal pins respond to a 0 to 10 V signal, delivering 1% to 100% of the output current based on rated current for each model. A pull-up resistor is included internal to the driver. If the +Dim input is > 10 V or open circuited, the output current is programmed to 100% of the rated current.

The maximum source current (flowing from the driver to the 0-10 V dimmer) supplied by the +Dim Signal pin is ≤ 0.5 mA. The tolerance of the output current while being dimmed shall be +/-8% typical until down to 1 V.

Using the ERP LED Driver Configuration Tool (ERP GUI), users can select from several 0-10V dimming profiles, including a logarithmic profile, an ANSI C137.1-compliant profile, and non-linear profiles with either 1% or 10% minimum dimming, each available with or without dim-to-off.

Dim-to-off can be enabled or disabled independently, and a fully user-defined dimming profile can also be created, allowing precise programming of every point (A, B, C, D) along the dimming curve.

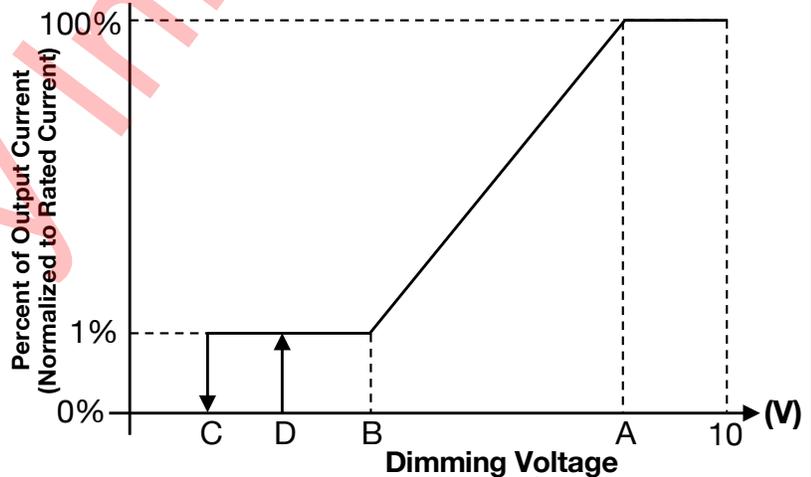


Figure 2

	Units	Minimum	Typical	Maximum	Tolerance	Notes
<b>Dimming Range</b>	%	1		100		When testing, if light is measured, dimming range is based on light output. If no light is measured, dimming range is based on percentage of output current.
<b>High Level Voltage - A (Recommended Range)</b>	V	7.0		9.0	±100 mV	Point A can actually be programmed to any value but it should never go below Point B.
<b>Low Level Voltage - B (Recommended Range)</b>	V	1.0		2.0	±100 mV	Point B can actually be programmed to any value but it should never go beyond Point A.
<b>Dim to Off Range - C (Recommended Range)</b>	V	0.5		1.0	±100 mV	
<b>Dim to On Range - D (Recommended Range)</b>	V	0.7		1.0	±100 mV	
<b>Current Supplied by the +Dim Signal Pin</b>	mA			0.5		
<b>Dimming Voltage Sensing Tolerance</b>	mV				100	The tolerance of the difference between the 0-10 V signal supplied by the dimmer and sensed by the driver.
<b>Output Current Tolerance While Being Dimmed</b>	%				±8	In the linear region of the dimming curve (between points A and B in Figure 2).
<b>Output Current Tolerance at Minimum Dimming</b>	%				±8	The tolerance of the output current at minimum dimming is +/-8% of 1% of the maximum output current of each driver.

## 20 to 50 W High Density CC Programmable Class 2 LED Driver with 0-10V and Tri-Mode™ Dimming (TRIAC, ELV, & 0-10 V), and With Optional Auxiliary Output

### 14 - COMPATIBLE 0-10 V DIMMERS

- Lutron, Nova series (part number NFTV)
- Lutron, Diva series (part number DVTV)
- Leviton, IllumaTech series (part number IP710-DL)

### 15 - CONNECTION AND COMPATIBILITY WITH EXTERNAL SENSORS




The PRH series is compatible with the Lutron Athena wireless node when programmed as an ANSI C137.1 0-10 V driver.



Athena RF Wireless Node

### Example of connection of an external PIR sensor (ANT-6-4T-BLE-CB) to the PRH series:

- Connect the +12V of sensor to the +Aux (yellow) wire of the PRH
- Connect the DIM+ of sensor to the +Dim (purple) of the PRH
- Connect the DIM- of sensor to the -Dim (pink) of the PRH
- Leave the -Aux (brown) of the PRH open

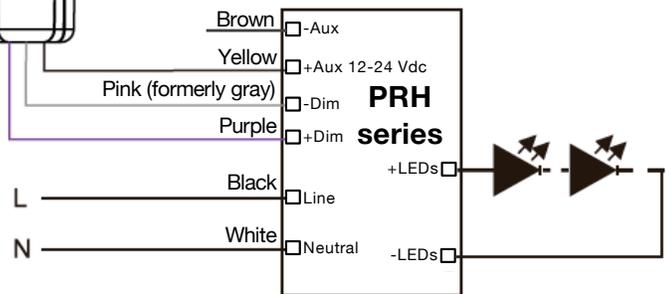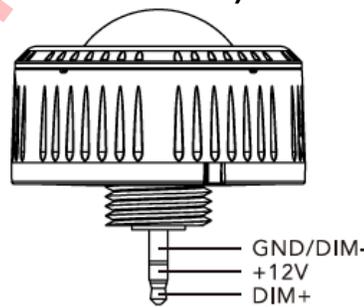

## 20 to 50 W High Density CC Programmable Class 2 LED Driver with 0-10V and Tri-Mode™ Dimming (TRIAC, ELV, & 0-10 V), and With Optional Auxiliary Output

### 16 - PROGRAMMING

The PRH series can be programmed by inserting the audio jack of the cable shown in figure 8 into the driver and by plugging the USB other end of the cable into a computer. The driver should not be powered on during the programming process.

When ordering the PRH series, please make sure to order a programming cable. The part number for the programming cable is “PROG-JACK-USB”.

#### Programming Cable

Part number: PROG-JACK-USB



Figure 8

Programming is done by using the ERP LED Driver Configuration Tool (also known as ERP GUI), downloadable through the ERP website (<https://www.erp-power.com/erp-light-engines/led-light-programming-software/>), which enables the user to adjust output current and dimming profile.

Please note that, for each model, the **default output current setting is listed on page 2 of this datasheet.**

Furthermore, when connecting the driver to a computer using the programming cable, you can access the driver’s internal data log and read the following information: SKU, serial number, manufacturing lot code, hours of operation, firmware revision, and power cycles.

While programming drivers in a lot, the ERP GUI can interface with a label printer, which enables the user to add configuration labels to driver labels in order to highlight programmed output current. Listed below is the equipment needed to print labels.

Equipment	Part Number	Where to buy
Printer	TSC TC210	<a href="http://barcodefactory.com/tsc/printers/tc210/99-059a001-54lf">barcodefactory.com/tsc/printers/tc210/99-059a001-54lf</a>
Ribbon	TSC Prem. Resin, 60mm x 110mm	<a href="http://barcodefactory.com/tsc/35-r060110-23cf">barcodefactory.com/tsc/35-r060110-23cf</a>
Labels	BAR-.81x.28-1-TT	<a href="http://barcodefactory.com/barcodefactory/labels/bar-.81x.28-1-tt">barcodefactory.com/barcodefactory/labels/bar-.81x.28-1-tt</a>

For more information, please refer to the ERP LED Driver Configuration Tool user’s manual at: (<https://www.erp-power.com/erp-light-engines/led-light-programming-software/>).

**IMPORTANT NOTE:** During the first power-up, the PRH automatically executes an internal calibration and synchronization routine during which it interrogates the LED load. This routine ensures that when multiple PRH drivers are installed within a single luminaire, such as extended linear fixtures, or across adjacent luminaires, they all start up and shut down in a synchronized manner, thereby eliminating the “popcorning” effect that can occur during asynchronous driver start-up.

The calibration process typically completes within 5 to 10 seconds. This process also occurs anytime the LED load (Vf) changes or the output current is re-programmed.

Each time the LED load (Vf) is changed, or the output current is re-programmed, the power-up cycle will exhibit a brief delay accompanied by an audible tone. This behavior is intentional and fully expected. The PRH series incorporates embedded intelligence designed to eliminate the popcorning effect.

Once this calibration is complete, all subsequent power-up events proceed normally with no delay or audible indication, provided that the LED load and output current remain unchanged.

## 20 to 50 W High Density CC Programmable Class 2 LED Driver with 0-10V and Tri-Mode™ Dimming (TRIAC, ELV, & 0-10 V), and With Optional Auxiliary Output


### 17 - MECHANICAL DETAILS (-SZ and -ST MODELS, NO AUXILIARY OUTPUT)

- **Packaging:** Metal case
- **I/O Connections:** 18 AWG on all leads, 22 AWG on 0-10V dimming wires, 157 mm (6.18 in) long, 105°C rated, stranded, stripped by approximately 9.5 mm, and tinned. All the wires, on both input and output, have a 300 V insulation rating.
- **Ingress Protection:** IP20 rated
- **Mounting Instructions:** The PRH driver case must be secured on a flat surface through the two mounting clips shown here below in the case outline drawings. The use of double-sided tape voids the warranty.  
The screw mounting holes have a diameter of 3.8 mm, compatible with screw size #6 (UNC/UNF), M3 or M3.5 (ISO).  
**THE CASE MUST BE GROUNDED.**

### 18 - OUTLINE DRAWINGS (-SZ and -ST MODELS, NO AUXILIARY OUTPUT)

**Dimensions:** L 84 \* W 40 \* H 19.25 mm (L 3.30 \* W 1.57 \* H 0.76 in.)

**Weight:**

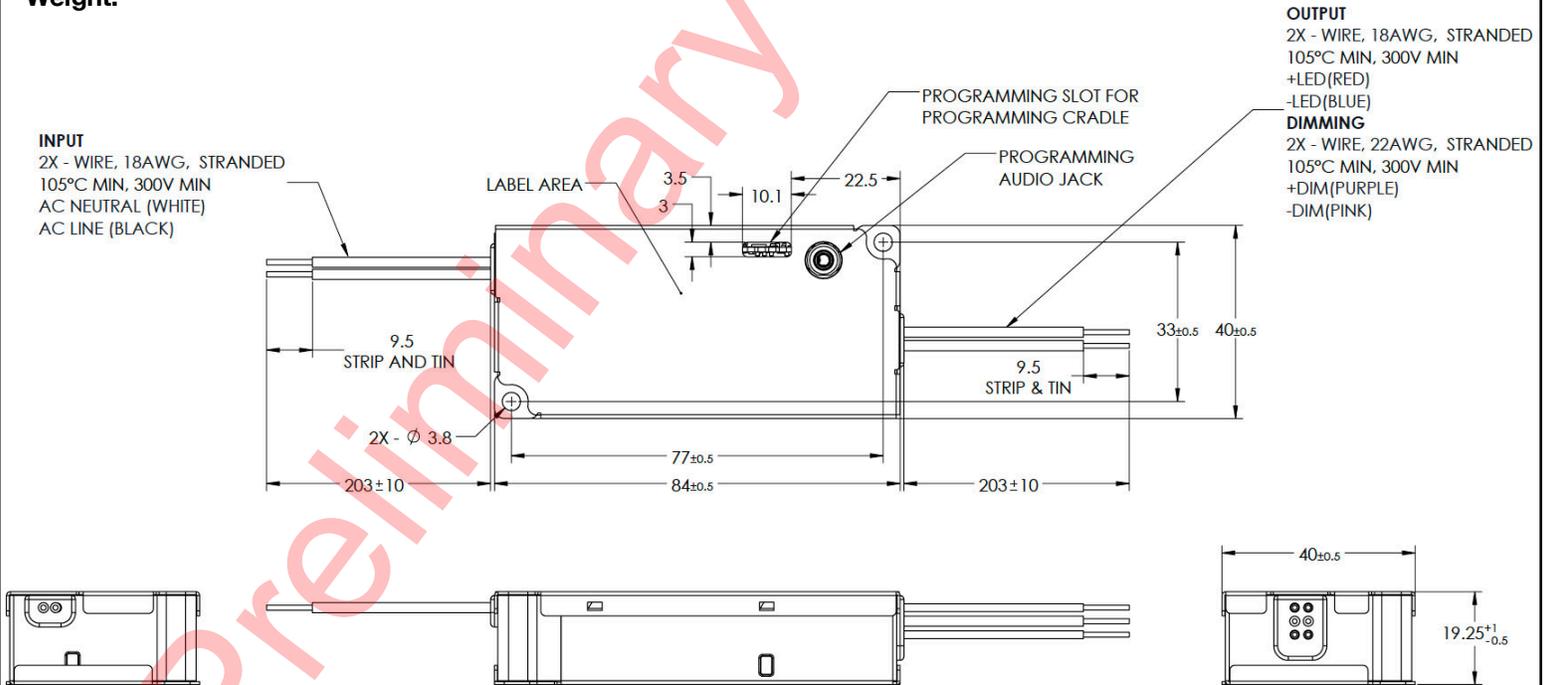

All dimensions are in mm

**Figure 9**

## 20 to 50 W High Density CC Programmable Class 2 LED Driver with 0-10V and Tri-Mode™ Dimming (TRIAC, ELV, & 0-10 V), and With Optional Auxiliary Output


### 19 - MECHANICAL DETAILS (-SXZ and -SXT MODELS, WITH AUXILIARY OUTPUT)

- **Packaging:** Metal case
- **I/O Connections:** 18 AWG on all leads, 22 AWG on 0-10V dimming wires, 157 mm (6.18 in) long, 105°C rated, stranded, stripped by approximately 9.5 mm, and tinned. All the wires, on both input and output, have a 300 V insulation rating.
- **Ingress Protection:** IP20 rated
- **Mounting Instructions:** The PRH driver case must be secured on a flat surface through the two mounting clips shown here below in the case outline drawings. The use of double-sided tape voids the warranty.  
The screw mounting holes have a diameter of 3.8 mm, compatible with screw size #6 (UNC/UNF), M3 or M3.5 (ISO).  
THE CASE MUST BE GROUNDED.

### 20 - OUTLINE DRAWINGS (-SXZ and -SXT MODELS, WITH AUXILIARY OUTPUT)

**Dimensions:** L 84 \* W 40 \* H 19.25 mm (L 3.30 \* W 1.57 \* H 0.76 in.)

**Weight:**

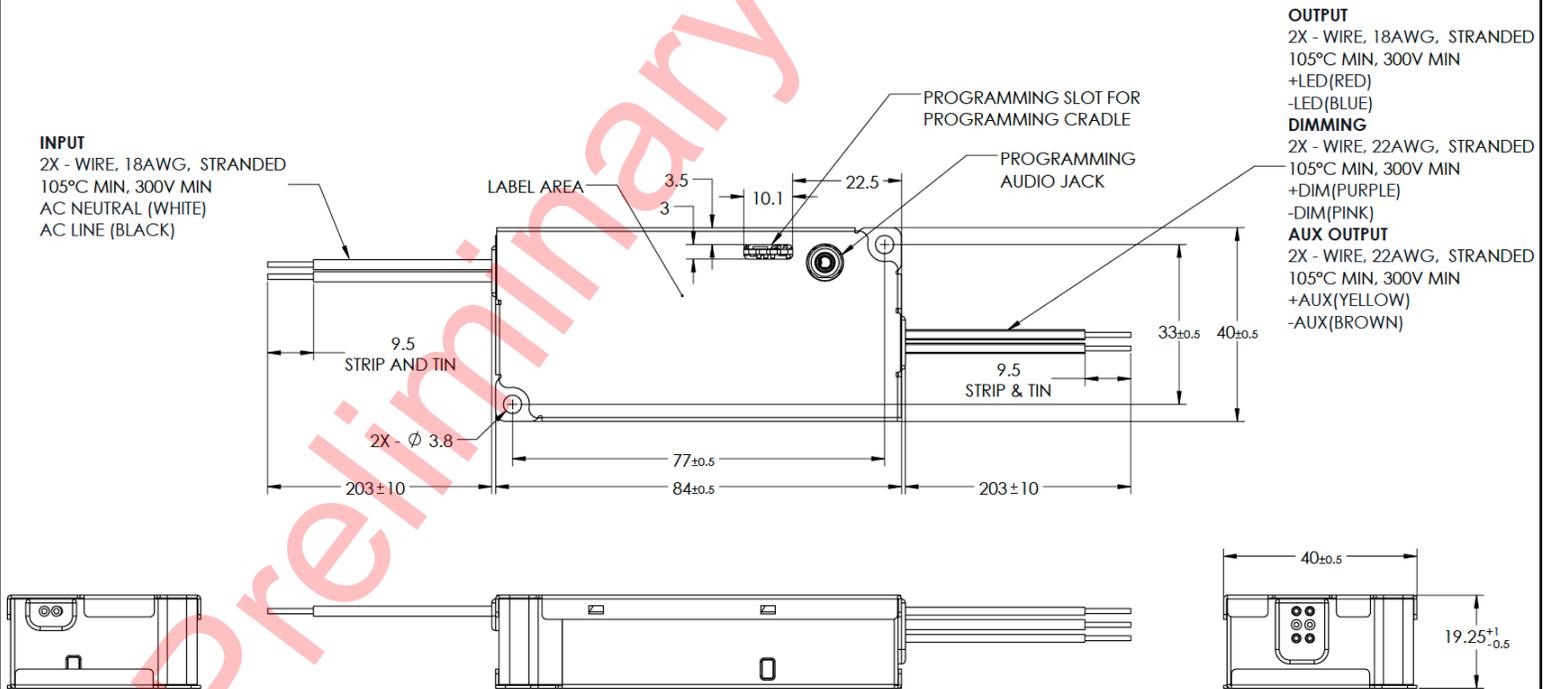

All dimensions are in mm

**Figure 10**

## 20 to 50 W High Density CC Programmable Class 2 LED Driver with 0-10V and Tri-Mode™ Dimming (TRIAC, ELV, & 0-10 V), and With Optional Auxiliary Output

### 21 - LABELING

The PRH-A20W-07-55-SXZ is used in figure 11 as an example to illustrate a typical label.

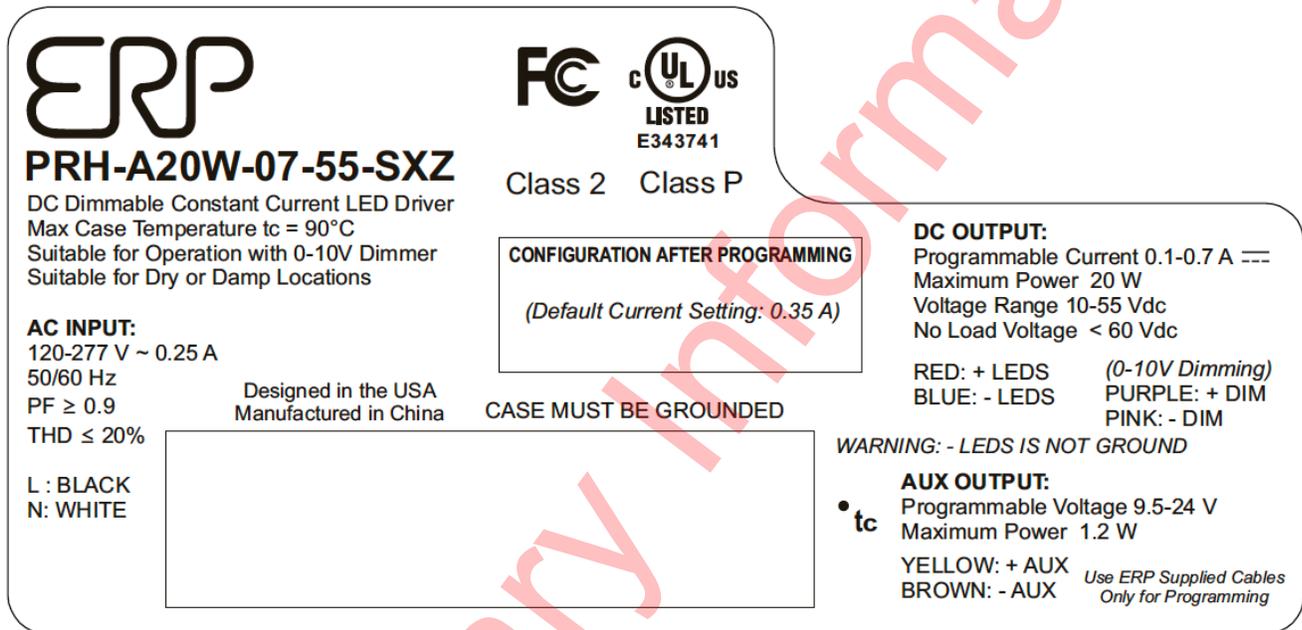


Figure 11

#### USA Headquarters

Tel: +1-805-517-1300  
 Fax: +1-805-517-1411  
 2625 Townsgate Road, Suite 106  
 Westlake Village, CA 91361, USA

#### CHINA Operations

Tel: +86-756-6266298  
 Fax: +86-756-6266299  
 No. 8 Pingdong Road 2  
 Zhuhai, Guangdong, China 519060

ERP Power, LLC (ERP) reserves the right to make changes without further notice to any products herein. ERP makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ERP assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in ERP data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ERP does not convey any license under its patent rights nor the rights of others. ERP products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the ERP product could create a situation where personal injury or death may occur. Should Buyer purchase or use ERP products for any such unintended or unauthorized application, Buyer shall indemnify and hold ERP and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ERP was negligent regarding the design or manufacture of the part. ERP is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.



POWER + LIGHT™

# PRH Series

<b>PRH-A20</b>	<b>20 W</b>
<b>PRH-A30</b>	<b>30 W</b>
<b>PRH-A50</b>	<b>50 W</b>

## 20 to 50 W High Density CC Programmable Class 2 LED Driver with 0-10V and Tri-Mode™ Dimming (TRIAC, ELV, & 0-10 V), and With Optional Auxiliary Output

### Revision History

Date	Comments
09OCT2024	<ul style="list-style-type: none"> <li>• Preliminary Release</li> </ul>
10APR2025	<ul style="list-style-type: none"> <li>• Updated the case dimensions and mechanical case outline</li> </ul>
14APR2025	<ul style="list-style-type: none"> <li>• Updated ambient operating temperature range and list of orderable part numbers</li> </ul>
19MAY2025	<ul style="list-style-type: none"> <li>• Removed CV operation</li> <li>• Engineering specification of record is 0010-03837X01</li> </ul>
10JUL2025	<ul style="list-style-type: none"> <li>• Changed 15 W version to 20 W</li> <li>• Engineering specification of record is 0010-03837X01</li> </ul>
11JUL2025	<ul style="list-style-type: none"> <li>• Corrected UL safety certification and other miscellaneous items</li> <li>• Engineering specification of record is 0010-03837X01</li> </ul>
07AUG2025	<ul style="list-style-type: none"> <li>• Updated MCO</li> <li>• Engineering specification of record is 0010-03837X01</li> </ul>
27AUG2025	<ul style="list-style-type: none"> <li>• Added part numbers with 0-10V only (-SZ suffix)</li> <li>• Engineering specification of record is 0010-03837X01</li> </ul>
28AUG2025	<ul style="list-style-type: none"> <li>• Added part numbers with and without auxiliary output</li> <li>• Updated MCO</li> <li>• Added section 5 for auxiliary output</li> <li>• Updated wiring diagram and application diagram</li> <li>• Added operating envelope for PRH20</li> </ul>
04SEP2025	<ul style="list-style-type: none"> <li>• Added notes 1 &amp; 2 to the ORDERING INFORMATION section</li> </ul>
28OCT2025	<ul style="list-style-type: none"> <li>• Added specification for standby power</li> </ul>
11DEC2025	<ul style="list-style-type: none"> <li>• Updated MCO schematics</li> <li>• Added important note at the bottom of the programming page 14</li> <li>• Increased surge to 3 kV (DM)/3 kV (CM) based upon internal meeting on 12/10/2025</li> </ul>
24JAN2026	<ul style="list-style-type: none"> <li>• Rewrote section 6 (Default 0-10V Dimming Profile) and section 13 (0-10V Dimming)</li> <li>• Updated section 12 (Phase-cut dimming)</li> <li>• Added ANSI C137.1 compliance on front page</li> <li>• Removed the parameter IEC61000-3-2 in section which does not apply to North America</li> <li>• Updated acoustic noise in section 7</li> </ul>
27JAN2026	<ul style="list-style-type: none"> <li>• Updated section 15</li> </ul>