



DRIVING QUALITY OF LIGHT™



Programmable & Dimmable LED Drivers

Revision: March 2022

Our Target Markets



- Indoor Residential and Commercial lighting



- Outdoor street and area lighting



- Office lighting




- Warehouses, manufacturing facilities, and Large retail store application



- Parking garages



- Architectural lighting



- Display / Signage



- Stage Lighting (entertainment, concert)



DRIVING QUALITY OF LIGHT™

About ERP

ERP designs and manufactures energy-efficient LED drivers/power supplies for a wide range of lighting applications: from residential to commercial, industrial, outdoor, office buildings, architectural and stage lighting. Small yet powerful, ERP products deliver an industry-leading combination of compact size, extensive dimmer compatibility, and high efficiency at competitive cost. Headquartered in Moorpark, CA, ERP owns and operates its own ISO 9001 certified manufacturing facility to ensure quality of design, sourcing, production and testing.


- **Industry leader in high-efficiency (high-power-saving) & high-density (small footprint) LED drivers/power supplies**
- **Product offerings include standard and custom solutions for LED Lighting**
- **U.S.A. Headquarters in Moorpark, California, with sales/marketing, R&D, and technical support to serve the North-American market**
- **China Operations Center in Zhuhai include document center, QA, R&D, manufacturing, and sales / technical support to serve China and Asia**

Our Presence




ERP Manufacturing

ERP products are manufactured in our wholly owned manufacturing facility in Zhuhai, China. The factory is configured with high-speed production lines for LED drivers and high-density power supplies, as well as state of the art burn-in chambers and automated test equipment. Strategic manufacturing partners provide significant upside capabilities. ERP products go through 100% burn-in to eliminate “infant mortality” failures. ISO 9001:2015 certified, with regular audits by safety agencies.

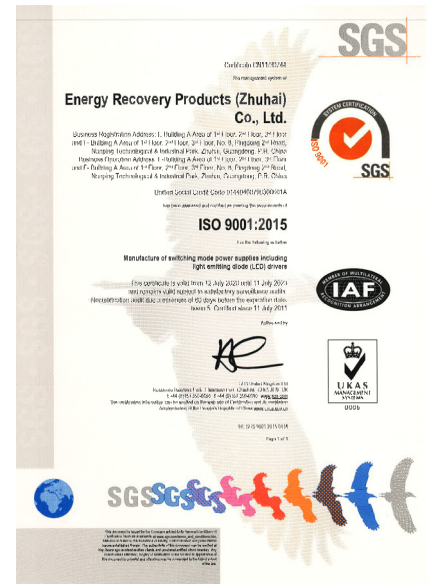

ERP Quality

Quality Management Systems (QMS)

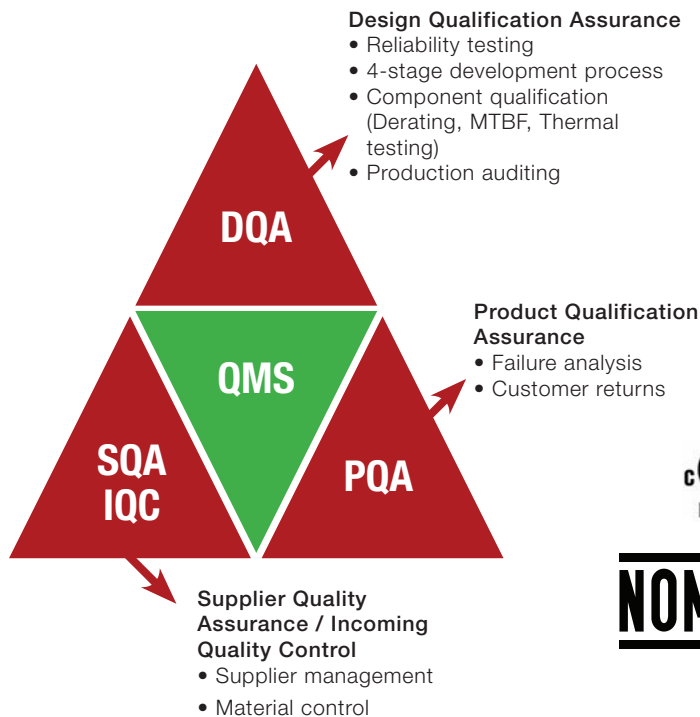

Standard Certifications




ERP products are designed and manufactured to comply with worldwide international IEC standards for lighting applications, and carry certifications by safety agencies such as UL, CSA and Nemko.

ERP products also comply with EMC regulations from Europe, and FCC/ICES in North America.



Best-In-Class Dimming


Forward-phase (TRIAC or leading-edge) and reverse-phase (ELV or trailing-edge)

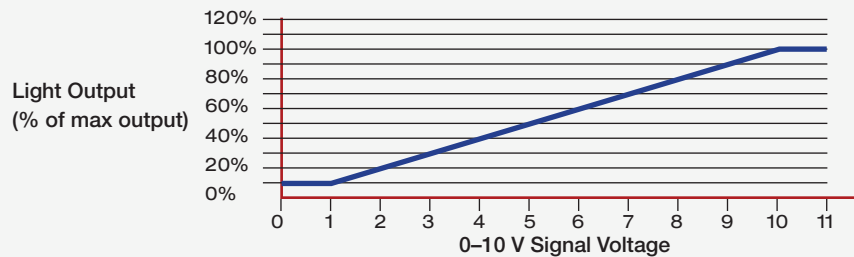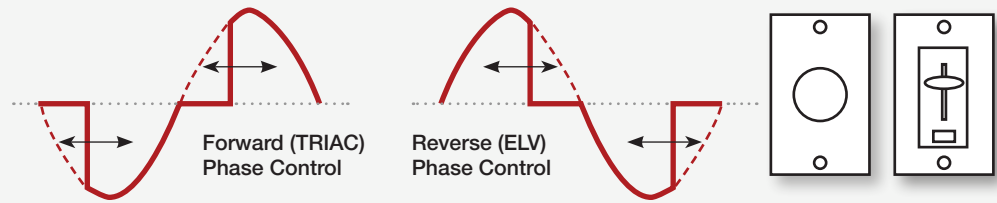

0-10 V control

Tri-Mode Dimming™

The majority of our LED drivers are compatible with Tri-Mode Dimming™ from 6 W up to 160 W, i.e. they are compatible with forward-phase (TRIAC or leading-edge), reverse-phase (ELV or trailing-edge) and 0-10 V dimmers.

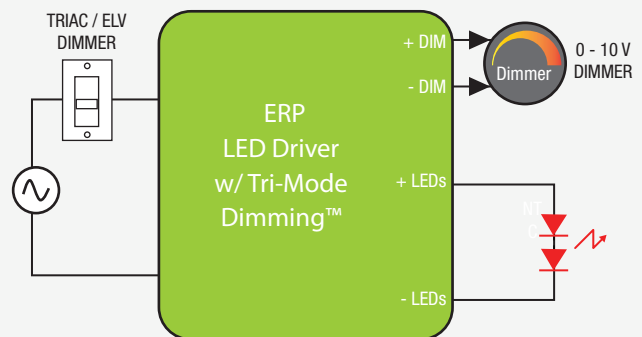

Broad Dimming Compatibility

ERP LED drivers deliver an extensive dimmer compatibility. For each LED driver, a dimming compatibility matrix is available upon request, showing how the LED driver scores against a long list of dimmers according to several criteria such as: flicker, shimmer, smooth dimming, no flash at startup, etc.

Power Density

Highest Power Density in the industry

The new patent-pending power electronics design delivers more than double the density of the previous generation ERP platform, while delivering 5 times the power density of current industry competitors.





LED Cross-Reference

ERP has developed an extensive cross-reference for 10 different LED manufacturers. This cross-reference can be directly accessed from the ERP website at www.erp-power.com. On the homepage, using the pull-down menus, select the LED manufacturer and then the LED. You may also select your desired drive current. The cross-reference tool will return a list of driver(s) that are the most relevant for your LED selection. You can also access the cross-reference by clicking on **LED GUIDE** at the top of the homepage. The LED guide lists the 10 LED manufacturers whose LEDs have been cross-referenced to some of our LED drivers.

	CITIZEN	
		
	LUMILEDS	XICATO AUTHORIZED DISTRIBUTOR
		

ERP Constant Current and Constant Voltage LED Driver Portfolios

Below are two graphs that illustrate our portfolio of constant current and constant voltage LED drivers. ERP LED drivers are targeted at architectural, commercial and industrial applications requiring 10 W to 260 W of power with dimming, programming and connectivity to the Internet of Lights. The color coded drivers are represented in this brochure.

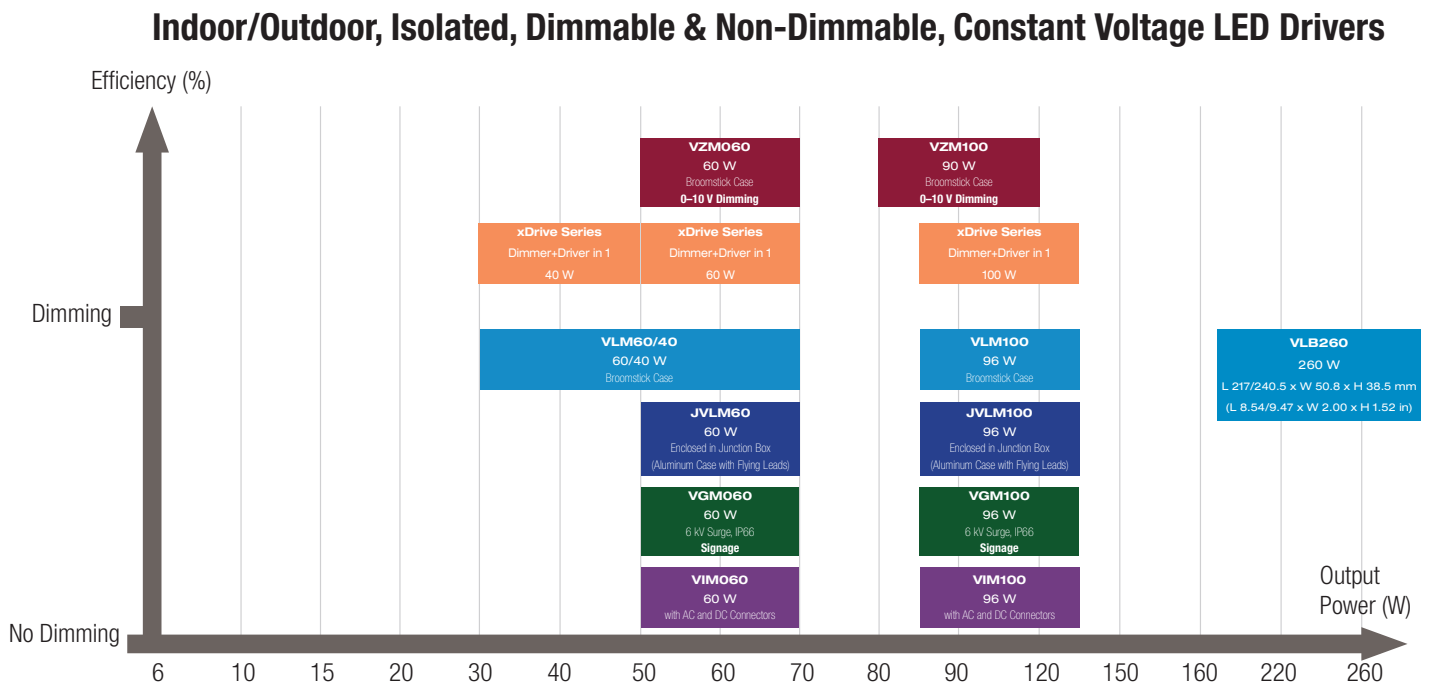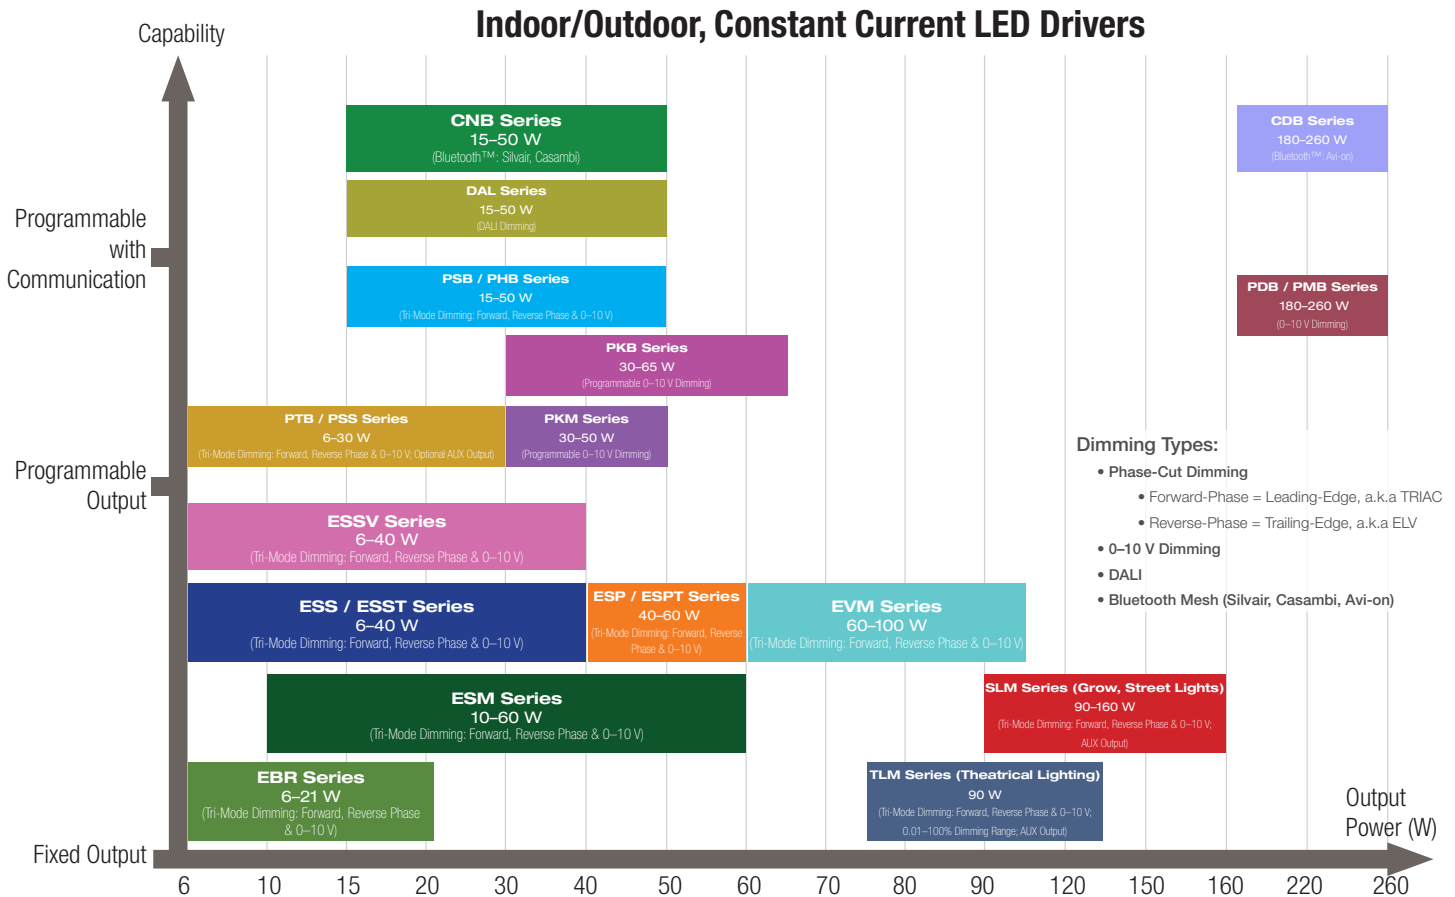


PSB SERIES 30 W – 50 W

Programmable, Constant Current, Class 2 / Class II LED Drivers
with Tri-Mode Dimming™ (TRIAC, ELV and 0–10 V)

Nominal Input Voltage	Max. Output Power	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 & 277 Vac, 220–240 Vac	50 W	up to 90% typical	90 °C (measured at the hot spot)	< 20%	> 0.9	Forward-Phase, Reverse-Phase, & Programmable 0–10 V	1–100% (% of Iout)	300 ms typical

Typical Application Diagram

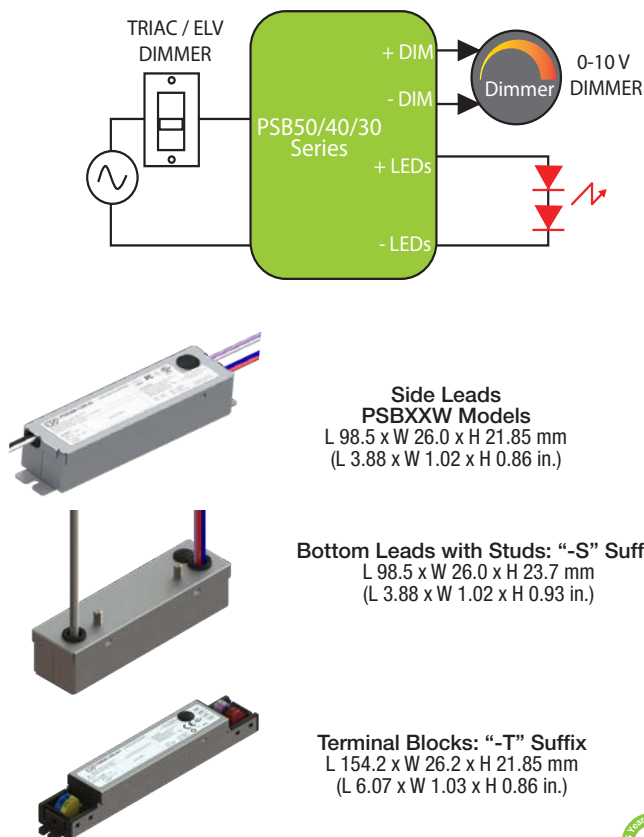

Features

- Non-linear 0–10 V dimming profile with dim-to-off pre-loaded by default (10 V to 9.0 V = 100%, 1.5 V to 0.7 V = 1%, < 0.7 V = dim-to-off)
- UL Class P
- Class 2 output / Class II power supply
- Lifetime: 50,000 hours @ Tc = 75 °C
- 90 °C maximum case hot spot temperature
- IP20-rated case with silicone-based potting
- No TRIAC/ELV dimming for PSBXXE models, only 0–10 V dimming
- Surge protection:
 - IEC61000-4-5: 2 kV line to line / 2 kV line to earth
 - 2.5 kV ring wave: ANSI/IEEE c62.41.1-2002 & c62.41.2-2002 category A
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements

ERP Part Number	Nominal Input Voltage (Vac)	Max. Output Power (W)	Iout (mA)	Vout Min. (Vdc)	Vout Nom. (Vdc)	Vout Max. (Vdc)	Open Loop (No Load) Voltage (Vdc)
120 & 277 VAC NOMINAL INPUT VOLTAGE							
PSB30W							
PSB30W-0700-42	120 & 277	29.4	350 to 700	28	37.8	42	50
PSB30W-1050-27	120 & 277	28.4	525 to 1050	18	24.3	27	35
PSB30W-0700-34	120 & 277	23.8	350 to 700	23	30.6	34	44.2
PSB30W-0700-42-S	120 & 277	29.4	350 to 700	28	37.8	42	50
PSB30W-1050-27-S	120 & 277	28.4	525 to 1050	18	24.3	27	35
PSB30W-0700-34-S	120 & 277	23.8	350 to 700	23	30.6	34	44.2
PSB40W							
PSB40W-1400-27	120 & 277	37.8	700 to 1400	18	24.3	27	35
PSB40W-1400-27-S	120 & 277	37.8	700 to 1400	18	24.3	27	35
PSB50W							
PSB50W-0550-85	120 & 277	46.8	275 to 550	57	76.5	85	100
PSB50W-0850-56	120 & 277	47.6	425 to 850	38	50.4	56	60
PSB50W-1200-42	120 & 277	50.4	600 to 1200	28	37.8	42	50
PSB50W-1400-34	120 & 277	47.6	700 to 1400	23	30.6	34	44.2
PSB50W-0550-85-S	120 & 277	46.8	275 to 550	57	76.5	85	100
PSB50W-0850-56-S	120 & 277	47.6	425 to 850	38	50.4	56	60
PSB50W-1200-42-S	120 & 277	50.4	600 to 1200	28	37.8	42	50
PSB50W-1400-34-S	120 & 277	47.6	700 to 1400	23	30.6	34	44.2
220–240 VAC NOMINAL INPUT VOLTAGE							
PSB30E							
PSB30E-0700-42	220–240	29.4	350 to 700	28	37.8	42	50
PSB30E-0700-42-T	220–240	29.4	350 to 700	28	37.8	42	50
PSB30E-1050-27-T	220–240	28.4	525 to 1050	18	24.3	27	35
PSB30E-0700-34-T	220–240	27.2	350 to 700	23	30.6	34	44.2
PSB40E							
PSB40E-1400-27-T	220–240	37.8	700 to 1400	18	24.3	27	35
PSB50E							
PSB50E-1200-42	220–240	50.4	600 to 1200	28	37.8	42	50
PSB50E-0550-85-T	220–240	46.8	275 to 550	57	76.5	85	100
PSB50E-0850-56-T	220–240	47.6	425 to 850	38	50.4	56	60
PSB50E-1200-42-T	220–240	50.4	600 to 1200	28	37.8	42	50
PSB50E-1400-34-T	220–240	47.6	700 to 1400	23	30.6	34	44.2

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com

Programming


- Current: 100% to 50% in each voltage range
- Data log read: SKU, S/N, lot code, hours of operation, FW rev., power cycles
- Fully programmable and selectable 0–10 V dimming profiles: Non-linear with dim-to-off, Logarithmic, Non-Linear without dim-to-off

Typical Applications

- Commercial lighting
- Architectural lighting
- Residential lighting
- Indoor Lighting

Nominal Input Voltage	Max. Output Power	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 & 277 Vac	50 W	up to 90% typical	90 °C (measured at the hot spot)	< 20%	> 0.9	Programmable Forward-Phase, Reverse-Phase, & 0–10 V	1–100% (% of Iout)	300 ms typical

Typical Application Diagram

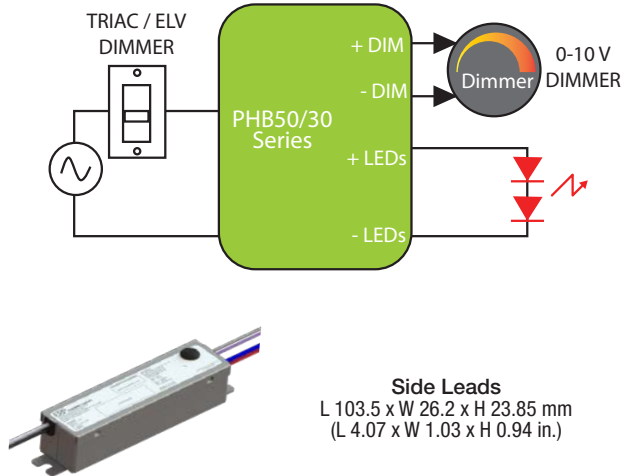

Bottom Leads with Studs: “-S” Suffix
L 103.5 x W 26.2 x H 23.85 mm
(L 4.07 x W 1.03 x H 0.94 in.)



Features

- Ripple < 10% @ 20% & 100% load for TRIAC, ELV, and 0–10 V
- Turn-on at 1% Iout for TRIAC, ELV, and 0–10 V dimming
- Programmable conduction angles with turn-on & turn-off for TRIAC & ELV
- Programmable 0–10 V dimming profile
- Non-linear 0–10 V dimming profile with dim-to-off pre-loaded by default (10 V = 90%, 1.5 V = 10%, < 0.7 V = dim-to-off)
- UL Class P
- Class 2 output / Class II power supply
- Lifetime: 50,000 hours @ Tc ≤ 75°C
- 90°C maximum case hot spot temperature
- IP20-rated case with silicone-based potting
- Surge protection:
 - IEC61000-4-5: 2 kV line to line / 2 kV line to earth
 - 2.5 kV ring wave: ANSI/IEEE c62.41.1-2002 & c62.41.2-2002 category A
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements

ERP Part Number	Nominal Input Voltage (Vac)	Max. Output Power (W)	Iout (mA)	Vout Min. (Vdc)	Vout Nom. (Vdc)	Vout Max. (Vdc)	Open Loop (No Load) Voltage (Vdc)
120 & 277 VAC NOMINAL INPUT VOLTAGE							
PHB30W							
PHB30W-0500-42	120 & 277	21.0	250 to 500	28	37.8	42	50
PHB30W-0700-42	120 & 277	29.4	350 to 700	28	37.8	42	50
PHB30W-0500-42-S	120 & 277	21.0	250 to 500	28	37.8	42	50
PHB30W-0700-42-S	120 & 277	29.4	350 to 700	28	37.8	42	50
PHB50W							
PHB50W-0850-56	120 & 277	47.6	425 to 850	38	50.4	56	60
PHB50W-1200-42	120 & 277	50.4	600 to 1200	28	37.8	42	50
PHB50W-0850-56-S	120 & 277	47.6	425 to 850	38	50.4	56	60
PHB50W-1200-42-S	120 & 277	50.4	600 to 1200	28	37.8	42	50


For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com

Programming

- Current: 100% to 50% in each voltage range
- Data log read: Data log read: SKU, S/N, lot code, hours of operation, FW rev., power cycles
- Fully programmable and selectable 0–10 V dimming profiles: Non-linear with dim-to-off, Logarithmic, Non-Linear without dim-to-off
- Programmable conduction angles with turn-on & turn-off for TRIAC & ELV



Typical Applications

- Commercial lighting
- Architectural lighting
- Residential lighting
- Indoor Lighting

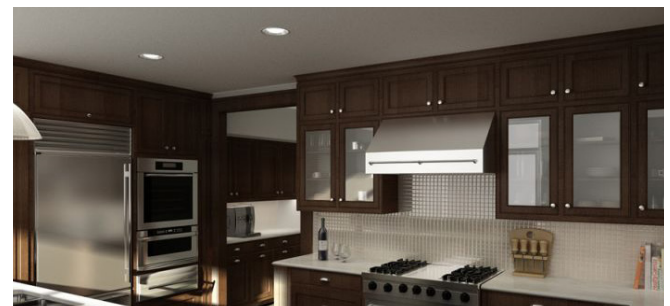

Input Voltage	Max. Output Power	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120–277 Vac	30 W	up to 90% typical	90 °C (measured at the hot spot)	< 20%	> 0.9	Programmable Forward-Phase, Reverse-Phase, & 0–10 V	1–100% (% of Iout)	300 ms typical

Typical Application Diagram

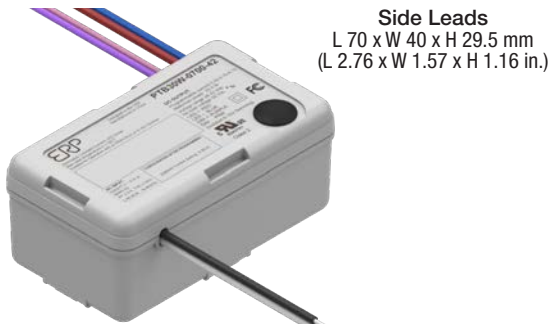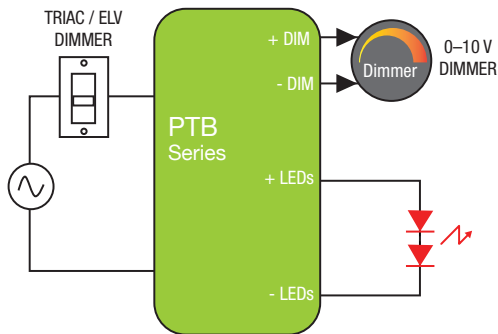

Side Leads
L 70 x W 40 x H 29.5 mm
(L 2.76 x W 1.57 x H 1.16 in.)



Features

- UL Class 2 power supply
- Lifetime: 50,000 hours @ Tc = 75°C
- 90°C maximum case hot spot temperature
- IP20-rated case with silicone-based potting
- Surge protection:
 - IEC61000-4-5: 2 kV line to line / 2 kV line to earth
 - 2.5 kV ring wave: ANSI/IEEE c62.41.1-2002 & c62.41.2-2002 category A
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements
- Meets IEEE 1789-2015 “no impact” recommended practices for flicker
- Mounting clips for multiple mounting methods

ERP Part Number	Input Voltage (Vac)	Max. Output Power (W)	Iout (mA)	Default Programmed Current (mA)	Vout Min. (Vdc)	Vout Max. (Vdc)
PTB10W						
PTB10W-0250-42-Z1 [®]	120–277	10.5	150 to 250	250	28	42
PTB10W-0250-42-ZN [®]	120–277	10.5	150 to 250	250	28	42
PTB15W						
PTB15W-0350-42 [®]	120–277	14.7	210 to 350	250	28	42
PTB15W-0350-42-FN [®]	120–277	14.7	210 to 350	250	28	42
PTB20W						
PTB20W-0420-42-Z1 [®]	120–277	17.6	250 to 420	350	28	42
PTB20W-0420-42-ZN [®]	120–277	17.6	250 to 420	350	28	42
PTB30W						
PTB30W-0500-42 [®]	120–277	21.0	300 to 500	350	28	42
PTB30W-0500-42-FN [®]	120–277	21.0	300 to 500	350	28	42
PTB30W-0700-42 [®]	120–277	29.4	420 to 700	500	28	42
PTB30W-0700-42-FN [®]	120–277	29.4	420 to 700	500	28	42
PTB30W-0700-42-Z1 [®]	120–277	29.4	420 to 700	500	28	42
PTB30W-0700-42-ZN [®]	120–277	29.4	420 to 700	500	28	42

Suffix for the different options:

1. “-Z1”: Dim-to-off capable, 0–10 V circuit isolation from DC output and AC input
2. “-ZN”: Dim-to-off capable, 0–10 V circuit isolation from AC input
3. NO suffix: No dim-to-off, 0–10 V circuit isolation from DC output and AC input
4. “-FN”: No dim-to-off, 0–10 V circuit isolation from AC input

Notes:

- Models with the “-Z1” and “-ZN” suffix feature dim-to-off and exhibit a default non-linear 0–10 V dimming profile: 10 V to 8.2 V = 100%, 1.5 V to 0.7 V = 1%, dim-to-off < 0.7. Dim-to-off is only available on “-Z1” and “-ZN” model numbers.
- By default, each PTB series driver is shipped with 2 metal mounting clips. Additional mounting clips can be ordered separately using the part number PTB-CLIPS-100 or PTB-CLIPS-1K.

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com

Programming

- Audio jack programming
- Current: 100% to 60% in each voltage range
- 0–10 V dimming profiles: linear, non-linear, logarithmic
- Programmable conduction angles with turn-on and turn-off for TRIAC and ELV
- Data log read: SKU, S/N, lot code, hours of operation, FW rev., power cycles


Typical Applications

- Commercial lighting
- Architectural lighting
- Residential lighting
- Indoor lighting



Input Voltage	Max. Output Power	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120–277 Vac	30 W	up to 90% typical	90 °C (measured at the hot spot)	< 20%	> 0.9	Programmable Forward-Phase, Reverse-Phase, & 0–10 V	1–100% (% of Iout)	300 ms typical

Typical Application Diagram

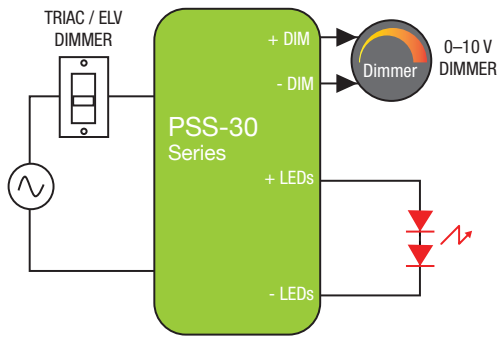

ERP Part Number	Input Voltage (Vac)	Max. Output Power (W)	Iout (mA)	Default Programmed Current (mA)	Vout Min. (Vdc)	Vout Max. (Vdc)
PSS30W						
PSS30W-0500-42 ¹	120–277	21.0	300 to 500	350	28	42
PSS30W-0500-42-FN ²	120–277	21.0	300 to 500	350	28	42
PSS30W-0700-42 ¹	120–277	29.4	420 to 700	500	28	42
PSS30W-0700-42-FN ²	120–277	29.4	420 to 700	500	28	42

Suffix for the different options:

1. NO suffix: 0–10 V circuit isolation from DC output and AC input
2. "-FN": 0–10 V circuit isolation from AC input

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com



Programming

- Audio jack programming
- Current: 100% to 60% in each voltage range
- 0–10 V dimming profiles: linear, non-linear, logarithmic
- Programmable conduction angles with turn-on and turn-off for TRIAC and ELV
- Data log read: SKU, S/N, lot code, hours of operation, FW rev., power cycles



Features

- UL Class 2 power supply
- Lifetime: 50,000 hours @ Tc = 75°C
- 90°C maximum case hot spot temperature
- IP20-rated case with silicone-based potting
- Surge protection:
 - IEC61000-4-5: 2 kV line to line / 2 kV line to earth
 - 2.5 kV ring wave: ANSI/IEEE c62.41.1-2002 & c62.41.2-2002 category A
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements


Typical Applications

- Commercial lighting
- Architectural lighting
- Residential lighting
- Indoor lighting



Nominal Input Voltage	Max. Output Power	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range
120–277 Vac	50 W	up to 90% typical	90 °C (measured at the hot spot)	< 20% (from 100% to 50% of load)	> 0.9 (from 100% to 50% of load)	DALI	1–100% (% of I _{out})

Typical Application Diagram

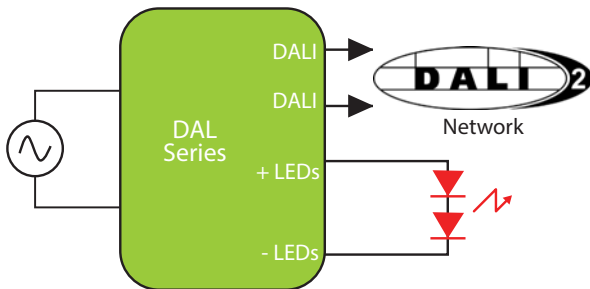

ERP Part Number	Nominal Input Voltage (Vac)	Max. Output Power (W)	I _{out} (mA)	V _{out} Min. (Vdc)	V _{out} Nom. (Vdc)	V _{out} Max. (Vdc)	Open Loop (No Load) Voltage (Vdc)
DAL30W							
DAL30W-0600-42-T	120–277	25.2	300 to 600	28	37.8	42	50
DAL50W							
DAL50W-0850-56-T	120–277	47.6	425 to 850	38	50.4	56	60
DAL50W-1200-42-T	120–277	50.4	600 to 1200	28	37.8	42	50

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com



Terminal Blocks, Aluminum Case
L 132.2 x W 30.6 x H 20.7 mm
(L 5.21 x W 1.20 x H 0.81 in.)

Features

- Universal input voltage range
- Ripple < 10% @ 20% & 100% load
- Turn-on: @ 1% I_{out}
- EMI: Compliant with FCC CFR Title 47 Part 15 Class B at 120 Vac & Class A at 277 Vac and with CE EN55015 (CISPR 15) at 220, 230, and 240 Vac
- Safety, Compliance
 - UL: Class 2 output, Class P
 - CB, CE
 - FCC, ENEC
 - DALI2, Device Type 6 (Parts 101, 102, 207)
- IP20-rated case with silicone-based potting
- Lifetime: 50,000 hours min. at 75 °C case temperature
- Class II power supply
- 90 °C maximum case hot spot temperature




NFC Programming

- Current: 100% to 50% in each voltage range
- Data log read: SKU, S/N, lot code, hours of operation, FW rev., power cycles

Nominal Input Voltage	Max. Output Power	Output Current	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 & 277 Vac	50 W	300 mA to 1200 mA	up to 90% typical	90 °C (measured at the hot spot)	< 20%	> 0.9	Bluetooth	1–100%	300 ms typical

Typical Application Diagram

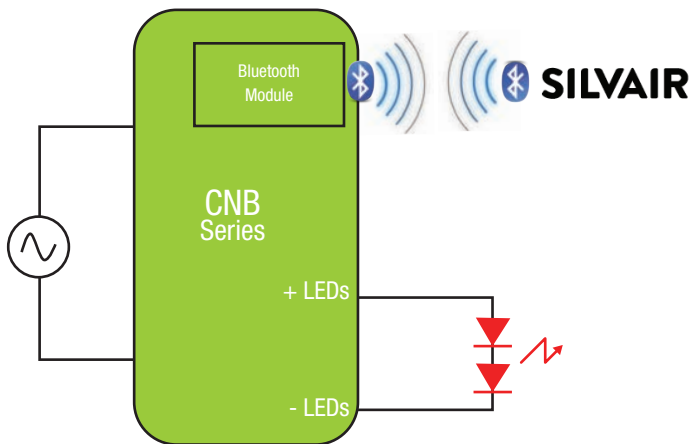

Side Leads
L 103.5 x W 27.3 x H 22.65 mm
(L 4.07 x W 1.07 x H 0.89 in.)


ERP Part Number	Nominal Input Voltage (Vac)	Max. Output Power (W)	Iout (mA)	Vout Min. (Vdc)	Vout Max. (Vdc)
CNB30W: 21–30 W					
CNB30W-0600-42-SIL	120 & 277	25.2	300 to 600	28	42
CNB50W: 51–60 W					
CNB50W-1200-42-SIL	120 & 277	50.4	600 to 1200	28	42

“-SIL” Suffix: Rigado BMD-300/1 Bluetooth Mesh module with Silvaair Bluetooth firmware, with wire whip antenna, Side Leads case

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com

NFC Programming

- Current: 100% to 50% in each voltage range
- Data log read: SKU, S/N, lot code, hours of operation, FW rev., power cycles



Features

- UL Class P
- Class 2 power supply
- Lifetime: 50,000 hours @ Tc ≤ 75 °C
- 90 °C maximum case hot spot temperature
- IP20-rated case with silicone-based potting
- Surge protection:
 - IEC61000-4-5: 2 kV line to line / 2 kV line to earth
 - 2.5 kV ring wave: ANSI/IEEE c62.41.1-2002 & c62.41.2-2002 category A
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements


Typical Applications

- Commercial lighting
- Indoor lighting
- Architectural lighting



Nominal Input Voltage	Max. Output Power	Output Current	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 & 277 Vac	50 W	300 mA to 1200 mA	up to 90% typical	90 °C (measured at the hot spot)	< 20%	> 0.9	Bluetooth	1–100%	300 ms typical

Typical Application Diagram

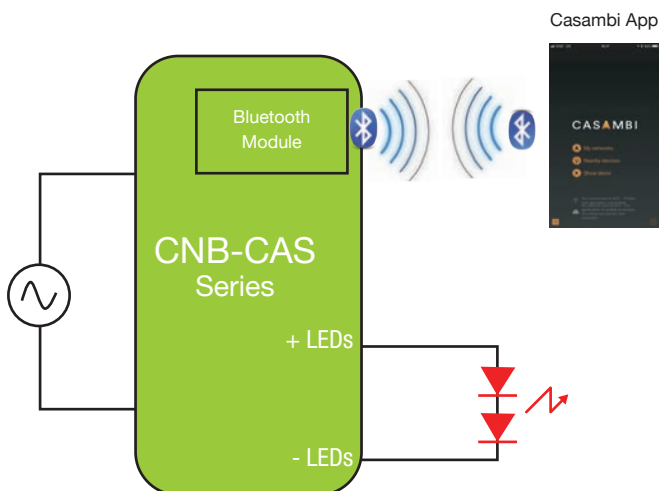

ERP Part Number	Nominal Input Voltage (Vac)	Max. Output Power (W)	Iout (mA)	Vout Min. (Vdc)	Vout Max. (Vdc)
CNB30W: 21–30 W					
CNB30W-0600-42-CAS	120 & 277	25.2	300 to 600	28	42
CNB50W: 51–60 W					
CNB50W-1200-42-CAS	120 & 277	50.4	600 to 1200	28	42

“-CAS” Suffix: With Casambi Bluetooth firmware, wire whip antenna, Side Leads case

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com

NFC Programming


- Current: 100% to 50% in each voltage range
- Data log read: SKU, S/N, lot code, hours of operation, FW rev., power cycles

Casambi Bluetooth Mesh Solution

- Wireless lighting controls with simple set-up that anyone can use
- Pre-integrated Bluetooth mesh module enables brands to create multi-way controls and switching without additional wiring; no central gateway required
- Secure, reliable mobile app & software
- Dimming, grouping, many users, schedules, timers
- Virtually unlimited range with mesh
- Download for free; additional services available

Typical Applications

- Commercial lighting
- Architectural lighting
- Indoor lighting

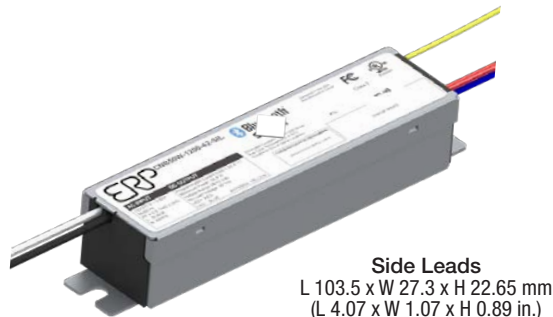

Side Leads
L 103.5 x W 27.3 x H 22.65 mm
(L 4.07 x W 1.07 x H 0.89 in.)





Features

- UL Class P
- Class 2 power supply
- Lifetime: 50,000 hours @ Tc ≤ 75 °C
- 90 °C maximum case hot spot temperature
- IP20-rated case with silicone-based potting
- Surge protection:
 - IEC61000-4-5: 2 kV line to line / 2 kV line to earth
 - 2.5 kV ring wave: ANSI/IEEE c62.41.1-2002 & c62.41.2-2002 category A
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements

Input Voltage	Max. Output Power	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120–277 Vac	65 W	86% typical	90 °C (measured at the hot spot)	< 20%	> 0.9	Programmable 0–10 V	1–100% (% of Iout)	300 ms typical

Typical Application Diagram

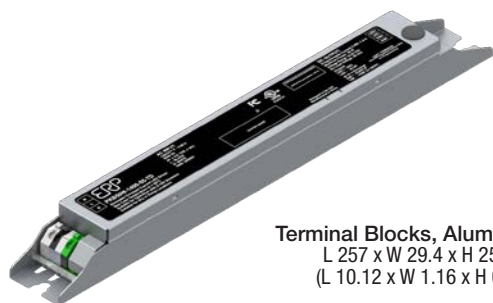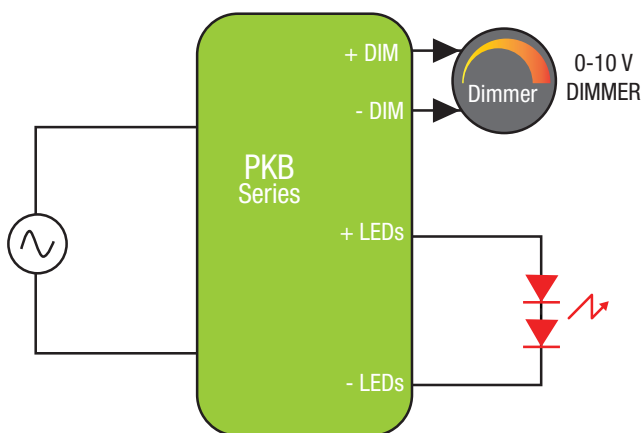

Terminal Blocks, Aluminum Case
L 257 x W 29.4 x H 25.1 mm
(L 10.12 x W 1.16 x H 0.99 in.)

ERP Part Number	Input Voltage (Vac)	Max. Output Power (W)	Iout (mA)	Vout Min. (Vdc)	Vout Nom. (Vdc)	Vout Max. (Vdc)	Open Loop (No Load) Voltage (Vdc)
PKB30W							
PKB30W-1050-55-TD™	120–277	30	275 to 1050	10	49.5	55	60
PKB30W-1050-55-TN™	120–277	30	275 to 1050	10	49.5	55	60
PKB50W							
PKB50W-1400-55-TD™	120–277	50	455 to 1400	10	49.5	55	60
PKB50W-1400-55-TN™	120–277	50	455 to 1400	10	49.5	55	60
PKB65W							
PKB65W-1800-55-TD™	120–277	65	591 to 1800	10	49.5	55	60
PKB65W-1800-55-TN™	120–277	65	591 to 1800	10	49.5	55	60

Suffix for the different options:

1. "-TD": Terminal Blocks, 0–10 V circuit isolation from DC output and AC input
2. "-TN": Terminal Blocks, 0–10 V circuit isolation from AC input

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com

Programming

- Audio jack programming
- 0–10 V dimming profiles: linear, non-linear, logarithmic
- Data log read: SKU, S/N, lot code, hours of operation, FW rev., power cycles

Features

- UL Class P
- Class 2 output
- Lifetime: 5 years @ Tc ≤ 75 °C
- 20% maximum ripple current
- 90°C maximum case hot spot temperature
- Surge protection:
 - IEC61000-4-5: 2 kV line to line / 2 kV line to earth
 - 2.5 kV ring wave: ANSI/IEEE c62.41.1-2002 & c62.41.2-2002 category A
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements


Typical Applications

- Commercial lighting
- Architectural lighting
- Residential lighting
- Indoor lighting




Input Voltage	Max. Output Power	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120–277 Vac	50 W	up to 90% typical	90 °C (measured at the hot spot)	< 20%	> 0.9	Programmable 0–10 V	1–100% (% of Iout)	300 ms typical

Typical Application Diagram

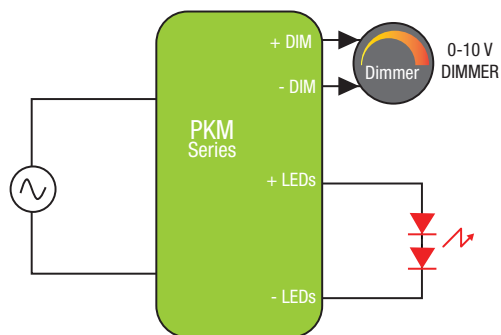

Side Leads, Metal Case (-NS, -NN)
L 106.7 x W 60.3 x H 25.3 mm
(L 4.20 x W 2.37 x H 0.99 in.)

Terminal Blocks, Metal Case (-TD, -TN)
L 106.7 x W 60.3 x H 25.5 mm
(L 4.20 x W 2.37 x H 1.00 in.)



Bottom Leads, Metal Case (-SD, -SN)
L 106.7 x W 60.3 x H 25.3 mm
(L 4.20 x W 2.37 x H 0.99 in.)

ERP Part Number	Input Voltage (Vac)	Max. Output Power (W)	Iout (mA)	Vout Min. (Vdc)	Vout Nom. (Vdc)	Vout Max. (Vdc)	Open Loop (No Load) Voltage (Vdc)
PKM30W							
PKM30W-1050-55-SD *	120–277	30	275 to 1050	10	49.5	55	60
PKM30W-1050-55-TD *	120–277	30	275 to 1050	10	49.5	55	60
PKM30W-1050-55-NS *	120–277	30	275 to 1050	10	49.5	55	60
PKM30W-1050-55-SN *	120–277	30	275 to 1050	10	49.5	55	60
PKM30W-1050-55-TN *	120–277	30	275 to 1050	10	49.5	55	60
PKM30W-1050-55-NN *	120–277	30	275 to 1050	10	49.5	55	60
PKM50W							
PKM50W-1400-55-SD *	120–277	50	455 to 1400	10	49.5	55	60
PKM50W-1400-55-TD *	120–277	50	455 to 1400	10	49.5	55	60
PKM50W-1400-55-NS *	120–277	50	455 to 1400	10	49.5	55	60
PKM50W-1400-55-SN *	120–277	50	455 to 1400	10	49.5	55	60
PKM50W-1400-55-TN *	120–277	50	455 to 1400	10	49.5	55	60
PKM50W-1400-55-NN *	120–277	50	455 to 1400	10	49.5	55	60

Suffix for the different options:

1. "-SD": Bottom leads w/ studs, 0–10 V circuit isolation from DC output and AC input
2. "-TD": Terminal Blocks w/ studs, 0–10 V circuit isolation from DC output and AC input
3. "-NS": Side leads no studs, 0–10 V circuit isolation from DC output and AC input
4. "-SN": Bottom leads w/ studs, 0–10 V circuit isolation from AC input
5. "-TN": Terminal Blocks w/ studs, 0–10 V circuit isolation from AC input
6. "-NN": Side leads no studs, 0–10 V circuit isolation from AC input

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com

Programming

- Audio jack programming
- NTC derating profile
- 0–10 V dimming profiles: linear, non-linear, logarithmic
- Data log read: SKU, S/N, lot code, hours of operation, FW rev., power cycles

Typical Applications

- Commercial lighting
- Architectural lighting
- Residential lighting
- Indoor lighting




Features

- UL Class P
- Class 2 output
- Lifetime: 5 years @ Tc ≤ 75 °C
- External NTC (negative temperature coefficient) functionality
- 90°C maximum case hot spot temperature
- Surge protection:
 - IEC61000-4-5: 2 kV line to line / 2 kV line to earth
 - 2.5 kV ring wave: ANSI/IEEE c62.41.1-2002 & c62.41.2-2002 category A
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements




Nominal Input Voltage	Max. Output Power	Output Voltage	Output Current	Efficiency	
120 & 277 Vac	40 W	6 to 56 Vdc	180 mA to 2.1 A Constant Current	up to 87% typical	
Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
90 °C (measured at the hot spot)	< 20%	> 0.9	Forward-Phase, Reverse-Phase, & 0–10 V	1–100% (% of Iout)	400 ms

Typical Application Diagram

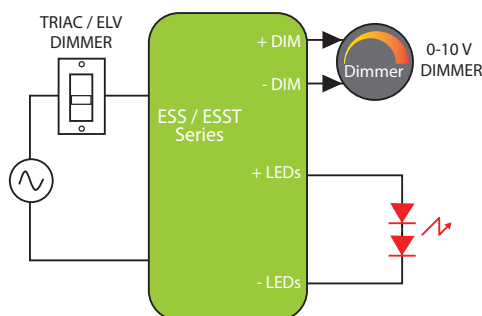

ESS Plastic Case
L 84 x W 40 x H 25 mm
(L 3.30 x W 1.57 x H 0.99 in.)

ESST Thermally Enhanced Plastic Case (ESST040 ONLY)
L 84 x W 40 x H 27 mm
(L 3.30 x W 1.57 x H 1.06 in.)

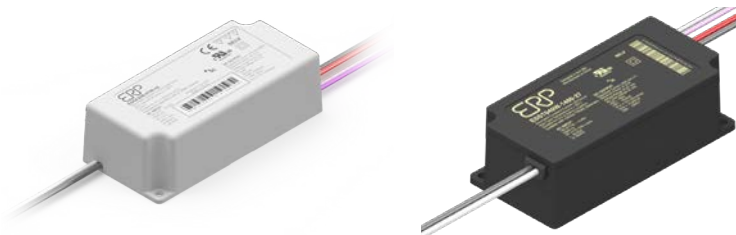

Features

- Compatible with TRIAC (forward-phase or leading-edge), ELV (reverse-phase or trailing-edge) and 0-10 V dimmers
- Only 0-10 V dimming at 277 Vac
- 90 °C maximum case hot spot temperature
- Class 2 power supply
- Lifetime: 50,000 hours at 70 °C case hot spot temperature (some models have higher lifetime. Check lifetime curves in spec sheet)
- IP64-rated (IP66 for ESST) case with silicone-based potting
- Protections: output open load, over-current and short-circuit (hiccup), and over-temperature with auto recovery
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class B (120 Vac) and Class A (277 Vac), and EN55015 (CISPR 15) at 220, 230, and 240 Vac
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements

ERP Part Number	Nominal Input Voltage (Vac)	Iout (mA)	Max. Output Power (W)	Output Voltage Range (Vdc)	
				min.	max.
ESS010W: up to 10 W					
ESS010W-0180-42	120 & 277	180	7.6	24	42
ESS010W-0200-42	120 & 277	200	8.4	24	42
ESS010W-0250-42	120 & 277	250	10.5	24	42
ESS010W-0250-42-Z1 ¹	120 & 277	250	10.5	24	42
ESS010W-0350-24	120 & 277	350	8.4	14	24
ESS010W-0500-12	120 & 277	500	6.0	6	12
ESS010W-0500-18	120 & 277	500	9.0	10	18
ESS010W-0700-13-Z1 ¹	120 & 277	700	9.1	8	13
ESS010W-0750-12	120 & 277	750	9.0	6	12
ESS015W: 11-15 W					
ESS015W-0300-42	120 & 277	300	12.6	24	42
ESS015W-0350-32	120 & 277	350	11.2	21	32
ESS015W-0350-42	120 & 277	350	14.7	24	42
ESS015W-0350-42-Z1 ¹	120 & 277	350	14.7	24	42
ESS015W-0440-25	120 & 277	440	11.0	19	25
ESS015W-0440-34	120 & 277	440	15.0	24	34
ESS015W-0700-18	120 & 277	700	12.6	10	18
ESS015W-0700-18-Z1 ¹	120 & 277	700	12.6	10	18
ESS015W-1000-12	120 & 277	1000	12.0	6	12
ESS015W-1050-14	120 & 277	1050	14.7	8	14
ESS015W-1050-14-Z1 ¹	120 & 277	1050	14.7	8	14
ESS020W: 16-20 W					
ESS020W-0350-56	120 & 277	350	19.6	40	56
ESS020W-0400-42	120 & 277	400	16.8	24	42
ESS020W-0450-42	120 & 277	450	18.9	24	42
ESS020W-0500-32	120 & 277	500	16.0	21	32
ESS020W-0500-34	120 & 277	500	17.0	24	34
ESS020W-0700-24	120 & 277	700	16.8	14	24
ESS020W-1400-14	120 & 277	1400	19.6	8	14
ESS020W-1400-14-Z1 ¹	120 & 277	1400	19.6	8	14
ESS030W: 21-30 W					
ESS030W-0500-42	120 & 277	500	21.0	24	42
ESS030W-0500-42-Z1 ¹	120 & 277	500	21.0	24	42
ESS030W-0550-42	120 & 277	550	23.1	24	42
ESS030W-0620-42	120 & 277	620	26.0	24	42
ESS030W-0700-32	120 & 277	700	22.4	21	32
ESS030W-0700-42	120 & 277	700	29.4	24	42
ESS030W-0700-42-Z1 ¹	120 & 277	700	29.4	24	42
ESS030W-0900-27	120 & 277	900	24.3	20	27
ESS030W-0900-32	120 & 277	900	28.8	21	32
ESS030W-1050-21	120 & 277	1050	22.1	14	21
ESS030W-1100-27	120 & 277	1100	29.7	20	27
ESS030W-1750-14	120 & 277	1750	24.5	8	14
ESS030W-1750-14-Z1 ¹	120 & 277	1750	24.5	8	14
ESST040W: 31-40 W					
ESST040W-0800-42	120 & 277	800	33.6	24	42
ESST040W-0850-42	120 & 277	850	35.7	24	42
ESST040W-0900-42	120 & 277	900	37.8	24	42
ESST040W-1400-24	120 & 277	1400	33.6	14	24
ESST040W-1400-27	120 & 277	1400	37.8	20	27

1. "-Z1" Suffix: Non-linear 0-10 V dimming profile (10 V to 8.1 V = 100%, 1 V to 0.8 V = 1%, Dim-to-off < 0.8 V)


For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com

Typical Applications

- Indoor & Outdoor
- Commercial lighting
- Architectural lighting
- Recessed lighting (downlights)
- Residential lighting
- Office Lighting

Nominal Input Voltage	Max. Output Power	Output Voltage	Output Current	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 & 277 Vac	40 W	20 to 42 Vdc	250 mA to 1.4 A Constant Current	up to 87% typical	90 °C (measured at the hot spot)	< 20%	> 0.9	Forward-Phase, Reverse- Phase, & 0–10 V	1–100% (% of Iout)	400 ms

Typical Application Diagram

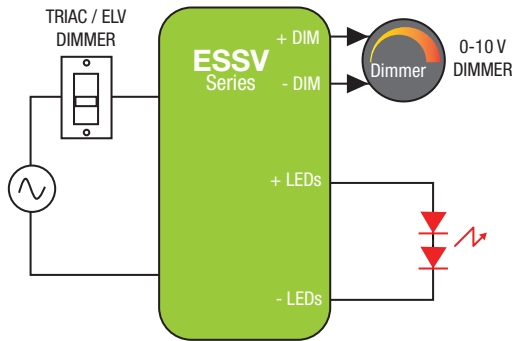

ERP Part Number	Nominal Input Voltage (Vac)	Iout (mA)	Max. Output Power (W)	Output Voltage Range (Vdc)	
				min.	max.
ESSV015W: 11–15 W					
ESSV015W-0300-42	120 & 277	300	12.6	24	42
ESSV030W: 21–30 W					
ESSV030W-0500-42	120 & 277	500	21.0	24	42
ESSV030W-0700-42	120 & 277	700	29.4	24	42

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com

Plastic Case
L 84 x W 40 x H 27 mm
(L 3.30 x W 1.57 x H 1.06 in.)



Features

- Same features as ESS/ESST series but with 5 VA flammability, UL Class P and a thermally-enhanced plastic case
- Compatible with TRIAC (forward-phase or leading-edge), ELV (reverse-phase or trailing-edge) and 0–10 V dimmers
- UL Class P
- 90 °C maximum case hot spot temperature
- Class 2 power supply
- Lifetime: 50,000 hours at 70 °C case hot spot temperature (some models have higher lifetime. Check lifetime curves in spec sheet)
- IP66-rated thermally-enhanced case with silicone-based potting
- Protections: output open load, over-current and short-circuit (hiccup), and over-temperature with auto recovery
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class B (120 Vac) and Class A (277 Vac)
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) & CA Title 24 technical requirements




Typical Applications

- Indoor & Outdoor
- Commercial lighting
- Architectural lighting
- Recessed lighting (downlights)
- Residential lighting
- Office Lighting



Nominal Input Voltage	Max. Output Power	Output Voltage	Output Current	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 Vac, 220–240 Vac	21 W	16 to 42 Vdc	200 to 700 mA Constant Current	up to 85% typical	90 °C (measured at the hot spot)	< 20%	> 0.9	Forward-Phase, Reverse-Phase	1–100% (% of Iout)	200 ms

Typical Application Diagram

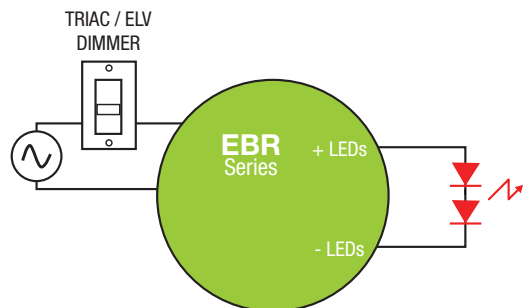

ERP Part Number	Nominal Input Voltage (Vac)	Iout (mA)	Max. Output Power (W)	Output Voltage Range (Vdc)	
				min.	max.
120 VAC NOMINAL INPUT VOLTAGE					
EBR010U: 8 –10 W					
EBR010U-0200-42	120	200	8.4	30	42
EBR010U-0250-42	120	250	10.5	30	42
EBR010U-0440-24	120	440	10.6	16	24
EBR015U: 11–15 W					
EBR015U-0300-42	120	300	12.6	30	42
EBR015U-0350-42	120	350	14.7	30	42
EBR015U-0440-36	120	440	15.8	24	36
EBR020U: 16–21 W					
EBR020U-0400-42	120	400	16.8	30	42
EBR020U-0500-32	120	500	16.0	21	32
EBR020U-0500-37	120	500	18.5	25	37
EBR020U-0500-42	120	500	21.0	30	42
EBR020U-0700-30	120	700	21.0	20	30
220–240 VAC NOMINAL INPUT VOLTAGE					
EBR010E: 8–10 W					
EBR010E-0250-42-CE	220–240	250	10.5	30	42
EBR015E: 11–15 W					
EBR015E-0350-42-CE	220–240	350	14.7	30	42
EBR020E: 16–21 W					
EBR020E-0500-42-CE	220–240	500	21.0	30	42

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com



Features

- Compatible with industry standard phase-cut dimmers: TRIAC (forward-phase or leading-edge) and ELV (reverse-phase or trailing-edge)
- Lifetime: 50,000 hours at 70 °C case hot spot temperature (some models have higher lifetime. Check lifetime curves in spec sheet)
- 90 °C maximum case hot spot temperature
- Low acoustic noise of 20 dBA
- Class 2 power supply
- Protections: output open load, over-current and short-circuit (hiccup), and over-temperature with auto recovery
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class B at 120 Vac and EN55015 (CISPR 15) at 220, 230 and 240 Vac
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements
- IP20-rated case with silicon-based potting


Typical Applications

- Recessed lighting (downlights)
- Architectural lighting
- Commercial lighting
- Residential lighting



Nominal Input Voltage	Max. Output Power	Output Voltage	Output Current	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 & 277 Vac	60 W	8 to 56 Vdc	280 mA to 1.4 A Constant Current	up to 87% typical	90 °C (measured at the hot spot)	< 20%	> 0.9	Forward-Phase, Reverse-Phase, & 0-10 V	1-100% (% of Iout)	400 ms

Typical Application Diagram

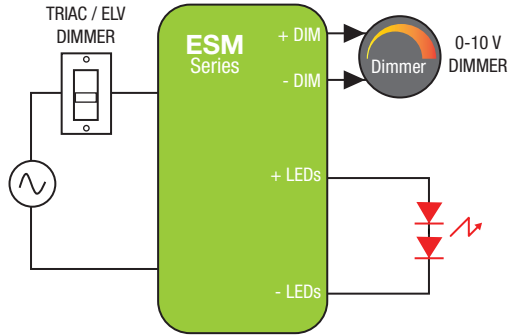

Metal Case
L 110 x W 60 x H 26 mm
(L 4.33 x W 2.36 x H 1.02 in.)



ERP Part Number	Nominal Input Voltage (Vac)	Iout (mA)	Max. Output Power (W)	Output Voltage Range (Vdc)	
				min.	max.
ESM020W: 11–20 W					
ESM020W-0280-42	120 & 277	280	11.8	24	42
ESM020W-0350-42	120 & 277	350	14.7	24	42
ESM020W-0440-34	120 & 277	440	15.0	19	34
ESM020W-1000-14	120 & 277	1000	14.0	8	14
ESM030W: 21–30 W					
ESM030W-0500-42	120 & 277	500	21.0	24	42
ESM030W-0550-42	120 & 277	550	23.1	24	42
ESM030W-0700-42	120 & 277	700	29.4	24	42
ESM030W-0900-26	120 & 277	900	23.4	20.5	26
ESM030W-1750-14	120 & 277	1750	24.5	8	14
ESM040W: 31–40 W					
ESM040W-0800-42	120 & 277	800	33.6	24	42
ESM040W-0850-42	120 & 277	850	35.7	24	42
ESM040W-0900-42	120 & 277	900	37.8	24	42
ESM040W-0940-43	120 & 277	940	40.4	32	43
ESM050W: 41–50 W					
ESM050W-1050-42	120 & 277	1050	44.1	24	42
ESM050W-1200-42	120 & 277	1200	50.4	24	42
ESM050W-1400-34	120 & 277	1400	47.6	23	34
ESM060W: 51–60 W					
ESM060W-1400-42	120 & 277	1400	58.8	24	42

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com

Features

- Compatible with TRIAC (forward-phase or leading-edge), ELV (reverse-phase or trailing-edge) and 0-10 V dimmers
- TRIAC and ELV dimming only at 120 Vac
- 90 °C maximum case temperature
- Class 2 power supply
- Lifetime: 50,000 hours at 70 °C case temperature (some models have higher lifetime. Check lifetime curves in spec sheet)
- IP20-rated case with silicone-based potting
- Protections: output open load, over-current and short-circuit (hiccup), and over-temperature with auto recovery
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class B (120 Vac) and Class A (277 Vac)
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) & CA Title 24 technical requirements
- Worldwide safety approvals


Typical Applications

- Indoor & Outdoor
- Commercial lighting
- Architectural lighting
- Recessed lighting (downlights)
- Residential lighting
- Office Lighting



Nominal Input Voltage	Max. Output Power	Output Voltage	Output Current	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 & 277 Vac	100 W	30 to 84 Vdc	1.4 to 2.35 A Constant Current	up to 87% typical	90 °C (measured at the hot spot)	< 20%	> 0.9	Forward-Phase, Reverse-Phase, & 0–10 V	1–100% (% of Iout)	400 ms

Typical Application Diagram

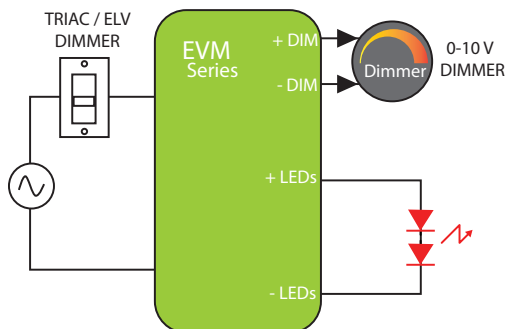

Metal Case
L 144 x W 70 x H 40 mm
(L 5.67 x W 2.76 x H 1.57 in.)



ERP Part Number	Nominal Input Voltage (Vac)	Iout (mA)	Max. Output Power (W)	Output Voltage Range (Vdc)	
				min.	max.
EVM060W: up to 60 W					
EVM060W-1400-42-Z1B	120 & 277	1400	58.8	30	42
EVM080W: 71–80 W					
EVM080W-1750-42-Z1B	120 & 277	1750	73.5	30	42
EVM080W-1900-42	120 & 277	1900	79.8	30	42
EVM090W: 81–90 W					
EVM090W-1050-84 ⁽¹⁾	120 & 277	1050	88.2	70	84
EVM090W-1700-48-N1B ⁽²⁾	120 & 277	1700	81.6	37	48
EVM090W-2000-42-Z1B	120 & 277	2000	84.0	30	42
EVM100W: 91–100 W					
EVM100W-2100-45	120 & 277	2100	94.5	32	45
EVM100W-2350-42	120 & 277	2350	98.7	30	42
EVM120W: 111–120 W					
EVM120W-2700-42 ⁽¹⁾	120 & 277	2700	113.4	30	42

1. Not Class 2.

2. The EVM090W-1700-48-N1B is specifically intended to drive the Cree LMH2 6000 module and exhibits a customized 0–10 V dimming transfer function.

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com

Features

- Compatible with TRIAC (forward-phase or leading-edge), ELV (reverse-phase or trailing-edge) and 0–10 V dimmers
- TRIAC and ELV dimming only at 120 Vac
- Outdoor surge protection: 3 kV line to line / 6 kV line to earth
- Linear 0–10 V dimming transfer function: 10 V = 100%, 1 V = 10%, 0.1 V = 1%
- Optional non-linear 0–10 V dimming profile with dim-to-off
- Lifetime: 50,000 hours at 70 °C case temperature
- 90 °C maximum case hot spot temperature
- Class 2 power supply (only some models)
- IP20-rated Bottom Leads with Studs metal case with silicone-based potting. Optional IP64 metal case with side leads
- Protections: output open load, over-current and short-circuit (hiccup), and over-temperature with auto recovery
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class B (120 Vac) and Class A (277 Vac)
- Complies with ENERGY STAR® luminaire specification and DLC (DesignLight Consortium®) technical requirements
- Worldwide safety approvals


Typical Applications

- High Bay Lights
- Tunnels & Street lighting
- Outdoor LED Lighting
- Suitable for driving high current COB LEDs such as Cree's CXA3050/3070/3590 and Bridgelux's Vero series, and modules such as Cree's LMH2 6000/8000
- Industrial LED Lighting
- Metal Halide replacements
- Wide-area downlights



Nominal Input Voltage	Max. Output Power	Output Voltage	Output Current	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 & 277 Vac, 220–240 Vac	60 W	21 to 56 Vdc	700 mA to 1.4 A Constant Current	up to 87% typical	90 °C (measured at the hot spot)	< 20%	> 0.9	Forward-Phase, Reverse-Phase, & 0–10 V	1–100% (% of Iout)	400 ms

Typical Application Diagram

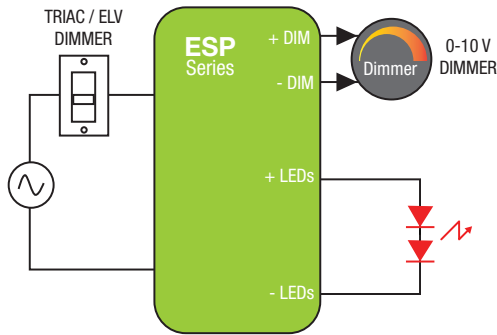

Plastic Case
L 90 x W 60 x H 27.2 mm
(L 3.54 x W 2.36 x H 1.07 in.)



Features

- NOT RECOMMENDED FOR NEW DESIGNS. FOR NEW DESIGNS, USE THE ESPT SERIES.
- Compatible with TRIAC (forward-phase or leading-edge), ELV (reverse-phase or trailing-edge) and 0–10 V dimmers
- ESPxxxW: only 0–10 V dimming at 277 Vac
- ESPxxxE models: only ELV dimming
- 90 °C maximum case hot spot temperature (some models have higher lifetime. Check lifetime curves in spec sheet)
- Class 2 power supply
- Lifetime: 50,000 hours at 70 °C case hot spot temperature
- IP66-rated case with silicone-based potting
- Protections: output open load, over-current and short-circuit (hiccup), and over-temperature with auto recovery
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class B (120 Vac) and Class A (277 Vac), and EN55015 (CISPR 15) at 220, 230, and 240 Vac
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements

ERP Part Number	Nominal Input Voltage (Vac)	Iout (mA)	Max. Output Power (W)	Output Voltage Range (Vdc)	
				min.	max.
120 & 277 VAC NOMINAL INPUT VOLTAGE					
ESP040W: 31–40 W					
ESP040W-0700-56	120 & 277	700	39.2	40	56
ESP040W-0800-42	120 & 277	800	33.6	24	42
ESP040W-0850-42	120 & 277	850	35.7	24	42
ESP040W-0900-42	120 & 277	900	37.8	24	42
ESP040W-0940-33-SS-F1 ⁽¹⁾	120 & 277	940	31.0	28	33
ESP040W-0940-43	120 & 277	940	40.4	35	43
ESP050W: 41–50 W					
ESP050W-1050-42	120 & 277	1050	44.1	24	42
ESP050W-1200-42	120 & 277	1200	50.4	24	42
ESP050W-1400-32	120 & 277	1400	44.8	21	32
ESP050W-1400-34	120 & 277	1400	47.6	23	34
ESP060W: 51–60 W					
ESP060W-1400-42	120 & 277	1400	58.8	24	42
220–240 VAC NOMINAL INPUT VOLTAGE					
ESP040E: 31–40 W					
ESP040E-0850-42	220–240	850	35.7	24	42
ESP060E: 51–60 W					
ESP060E-1400-42	220–240	1400	58.8	24	42

1. The ESP040W-0940-33-SS-F1 is specifically intended to drive the Cree LMH2 3000 sunset module and exhibits a customized 0–10 V dimming transfer function. It will not work with any other LED or LED string.

2. The ESP driver case can also be mounted by using two metal clips, one on each short side. The ordering part number for the two metal clips is ESP-CLIPS. By default, the ESP driver is shipped without metal clips. When metal clips are required, add ESP-CLIPS to your order.

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com


Typical Applications

- Indoor & Outdoor
- Commercial lighting
- Architectural lighting
- Recessed lighting (downlights)
- Residential lighting
- Office Lighting



Nominal Input Voltage	Max. Output Power	Output Voltage	Output Current	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 & 277 Vac	60 W	24 to 56 Vdc	700 mA to 1.4 A Constant Current	up to 87% typical	90 °C (measured at the hot spot)	< 20%	> 0.9	Forward-Phase, Reverse-Phase, & 0–10 V	1–100% (% of Iout)	400 ms

Typical Application Diagram

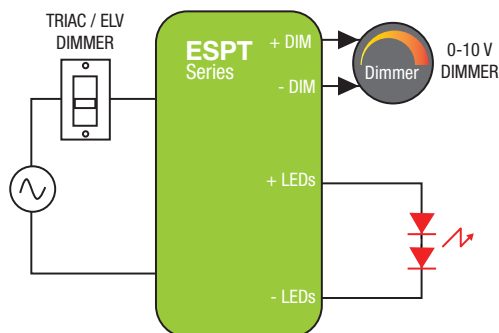

Plastic Case
L 87 x W 60 x H 30 mm
(L 3.43 x W 2.36 x H 1.18 in.)



ERP Part Number	Nominal Input Voltage (Vac)	Iout (mA)	Max. Output Power (W)	Output Voltage Range (Vdc)	
				min.	max.
ESPT050W: 41–50 W					
ESPT050W-1050-42-Z1 ¹⁾	120 & 277	1050	44.1	24	42
ESPT050W-1200-42-Z1 ¹⁾	120 & 277	1200	50.4	24	42
ESPT050W-1400-34	120 & 277	1400	47.6	23	34
ESPT060W: 51–60 W					
ESPT060W-1400-42-Z1 ¹⁾	120 & 277	1400	58.8	24	42

1. ESPT models with the “-Z1” suffix exhibit a non-linear 0–10 V dimming profile with dim-to-off: 10 V to 8.1 V = 100%, 1 V to 0.8 V = 1%, < 0.8 V dim-to-off.

2. The ESPT driver case must be mounted by using a minimum of two metal clips. By default, the ESPT driver is shipped with 2 metal clips. Additional metal clips can be ordered with the following part numbers:

- ESPT-CLIPS-100: bag of 100 clips
- ESPT-CLIPS-1k: bag of 1000 clips

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com

Features

- Same features as the ESP series but with a thermally-enhanced plastic case
- Compatible with TRIAC (forward-phase or leading-edge), ELV (reverse-phase or trailing-edge) and 0–10 V dimmers
- Only 0–10 V dimming at 277 Vac
- 90 °C maximum case hot spot temperature
- Class 2 power supply
- Lifetime: 50,000 hours at 70 °C case hot spot temperature (some models have higher lifetime. Check lifetime curves in spec sheet)
- IP66-rated case with silicone-based potting
- Two 0–10 V dimming profiles are available:
 - Linear 0–10 V dimming: 10 V = 100%, 1 V = 10%, 0.1 V = 1%.
 - Non-linear 0–10 V dimming: 10 V to 8.1 V = 100%, 1 V to 0.8 V = 1%, < 0.8 V dim-to-off.
- Protections: output open load, over-current and short-circuit (hiccup), and over-temperature with auto recovery
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class B (120 Vac) and Class A (277 Vac)
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) & CA Title 24 technical requirements

Typical Applications

- Indoor & Outdoor
- Commercial lighting
- Architectural lighting
- Recessed lighting (downlights)
- Residential lighting
- Office Lighting



SLM SERIES 90 W – 160 W


Tri-Mode Dimming™ (TRIAC, ELV & 0–10 V)

High Power, Constant Current LED Drivers

with 1–100% Dimming Range and with 12 V / 100 mA Auxiliary Output

Nominal Input Voltage	Max. Output Power	Output Voltage	Output Current	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 & 277 Vac	160 W	30 to 56 Vdc	1.7 to 2.8 A Constant Current	up to 90% typical	90 °C (measured at the hot spot)	< 20%	> 0.9	Forward-Phase, Reverse-Phase, & 0–10 V	1–100% (% of Iout)	0.75 sec

Typical Application Diagram

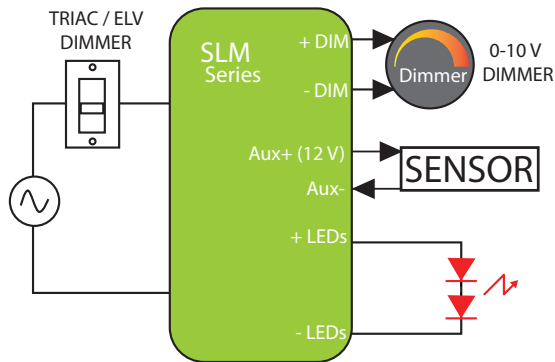

ERP Part Number	Nominal Input Voltage (Vac)	Max. Output Power (W)	Iout (A)	Vout Min. (Vdc)	Vout Max. (Vdc)
SLM90W: up to 90 W					
SLM090W-2.1-42-TC	120 & 277	88.2	2.1	30	42
SLM100W: 91–100 W					
SLM100W-1.7-56-TA	120 & 277	95.2	1.7	40	56
SLM120W: 111–120 W					
SLM160W-2.8-56-ZA	120 & 277	156.8	2.8	40	56

Forced air cooling or heatsink base plate (aluminum baseplate: 210 mm x 200 mm x 2 mm) is required for total continuous power exceeding 120 W.

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com

Aluminum Case
L 101.6 x W 50.8 x H 38.5 mm
(L 4 x W 2 x H 1.52 in.)



Typical Applications

- Outdoor & Indoor
- Horticulture grow lights
- Street lights, Area lights
- Industrial high-bay lights



Features

- Compatible with TRIAC (forward-phase or leading-edge) / ELV (reverse-phase or trailing-edge) and 0–10 V dimmers
- Only 0–10 V dimming at 277 Vac
- 12 V / 100 mA auxiliary output
- IP66-rated case with silicone-based potting
- 90 °C maximum case hot spot temperature
- Protections: output open load, short-circuit (latch-off), and over-temperature with auto recovery
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class A at 120 Vac & 277 Vac
- Complies with ENERGY STAR® luminaire specification and DLC (DesignLight Consortium®) technical requirements



TLM SERIES 90 W


Tri-Mode Dimming™ (TRIAC, ELV & 0–10 V)

High Power, Constant Current LED Drivers

with 0.01–100% Dimming Range and 12 V / 100 mA Auxiliary Output

Nominal Input Voltage	Max. Output Power	Output Voltage	Output Current	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range
120 & 277 Vac	90 W	30 to 42 Vdc	2.1 A Constant Current	up to 90% typical	90 °C (measured at the hot spot)	< 20%	> 0.9	Forward-Phase, Reverse-Phase, & 0–10 V	0.01–100% (% of Iout)


Typical Application Diagram

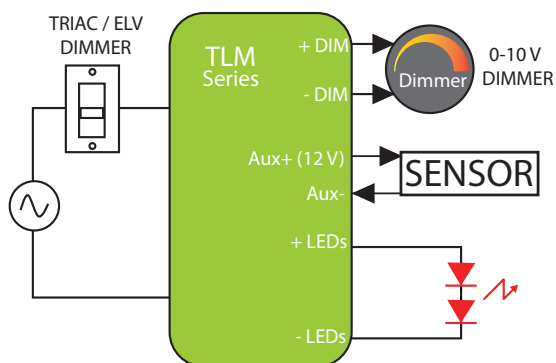

ERP Part Number	Nominal Input Voltage (Vac)	Iout (A)	Max. Output Power (W)	Vout Min. (Vdc)	Vout Max. (Vdc)
TLM90W: 81–90 W					
TLM90W-2.1-42	120 & 277	2.1	88.2	30	42

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com

Aluminum Case
L 101.6 x W 50.8 x H 38.5 mm
(L 4 x W 2 x H 1.52 in.)

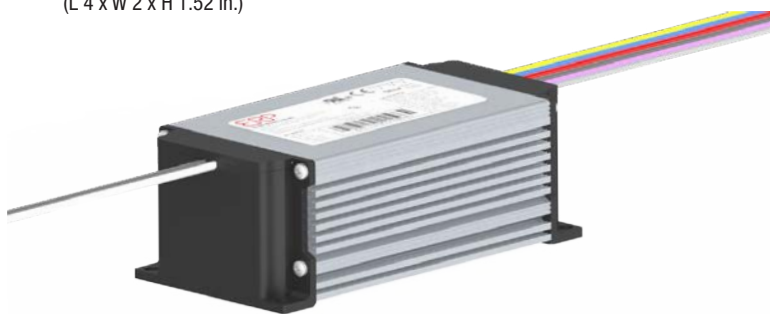

Features

- Dimming range: 0.01–100% with ETC, Leprecon and Elation stage lighting AC phase dimmers
- 12 V / 100 mA auxiliary output to power external fan, motion or ambient light sensor, or wireless module
- Only 0–10 V dimming at 277 Vac
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class A at 120 Vac & 277 Vac
- IP66-rated case with silicone-based potting
- 90 °C maximum case hot spot temperature
- Complies with ENERGY STAR® luminaire specification and DLC (DesignLight Consortium®) technical requirements


Typical Applications

- Stage, Theatrical lighting
- Studio Lighting



Nominal Input Voltage	Max. Output Power	Output Voltage	Output Current	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range
120 & 277 Vac	260 W	114 to 400 Vdc	325 mA to 1700 mA Constant Current	up to 93% typical	90 °C (measured at the hot spot)	< 20%	> 0.9	0–10 V	1–100% (% of Iout)

Typical Application Diagram

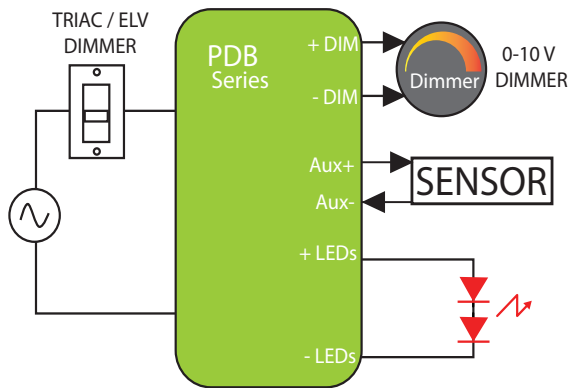

Aluminum Case
L 214.4/240 x W 50.8 x H 38.5 mm
(L 8.44/9.47 x W 2 x H 1.52 in.)



Features

- Non-linear 0–10 V dimming profile with dim-to-off (10 V to 9.1 V = 100%, 1.5 V to 0.6 V = 1%, < 0.6 V = dim-to-off)
- Auxiliary output 12 V / 100 mA
- Dual output voltage range
- UL Class P
- IP66-rated case with silicone-based potting
- Surge protection:
 - Combination wave IEC61000-4-5: 4 kV line to line / 4 kV line to earth (higher surge is available upon request)
 - 2.5 kV ring wave: ANSI/IEEE c62.41.1-2002 & c62.41.2-2002 category A
- 90 °C maximum case hot spot temperature
- Complies with ENERGY STAR® luminaire specification and DLC (DesignLight Consortium®) technical requirements

ERP Part Number	Nominal Input Voltage (Vac)	Max. Output Power (W)	Iout 1 (mA)	Vout 1 (Vdc)	Iout 2 (mA)	Vout 2 (Vdc)
PDB260W						
PDB260W-0860-400	120 & 277	260.0	430 to 860	234 to 300	325 to 650	312 to 400
PDB260W-1300-280	120 & 277	260.0	650 to 1300	156 to 200	465 to 930	218 to 280
PDB260W-1700-210	120 & 277	260.0	850 to 1700	117 to 150	620 to 1240	164 to 210

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com

Programming

- Current: 100% to 50% in each voltage range
- Output voltage range selection
- Data log read: SKU, S/N, lot code, hours of operation, FW rev., fault events: power failure, transients (short or surge), thermal events


Typical Applications

- Street lights, Area lights
- Industrial high-bay lights
- Horticulture grow lights



Nominal Input Voltage	Max. Output Power	Output Voltage	Output Current	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range
120 & 277 Vac	260 W	114 to 400 Vdc	325 mA to 1700 mA Constant Current	up to 93% typical	90 °C (measured at the hot spot)	< 20%	> 0.9	0–10 V	1–100% (% of Iout)

Typical Application Diagram

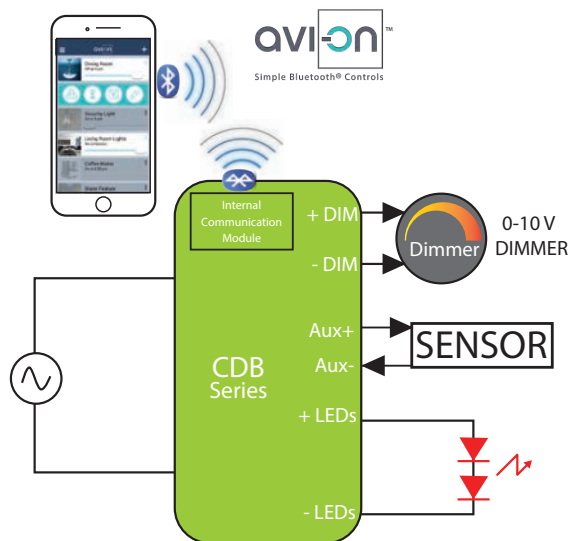

Aluminum Case
L 214.4/240 x W 50.8 x H 38.5 mm
(L 8.44/9.47 x W 2 x H 1.52 in.)



Features

- Non-linear 0–10 V dimming profile with dim-to-off
- Auxiliary output 12 V / 100 mA
- IP66-rated case with silicone-based potting
- UL Class P
- Outdoor Surge protection:
 - IEC61000-4-5: 4 kV line to line / 4 kV line to earth
 - 2.5 kV ring wave: ANSI/IEEE c62.41.1-2002 & c62.41.2-2002 category A
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class A at 120 Vac & 277 Vac
- Lifetime: 50,000 hours @ Tc = 70 °C
- 90 °C maximum case hot spot temperature
- Complies with ENERGY STAR® luminaire specification and DLC (DesignLight Consortium®) technical requirements

ERP Part Number	Nominal Input Voltage (Vac)	Max. Output Power (W)	Iout 1 (mA)	Vout 1 (Vdc)	Iout 2 (mA)	Vout 2 (Vdc)
CDB260W						
CDB260W-0860-400	120 & 277	260.0	430 to 860	234 to 300	325 to 650	312 to 400
CDB260W-1300-280	120 & 277	260.0	650 to 1300	156 to 200	465 to 930	218 to 280
CDB260W-1700-210	120 & 277	260.0	850 to 1700	117 to 150	620 to 1240	164 to 210

1. To order the antenna option "Wire whip antenna", add the suffix "-W". Example: CDB260W-0860-400-W.
2. To order the antenna option "Removable external antenna connected to RPSMA connector", add the suffix "-R". Example: CDB260W-0860-400-R

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com

Programming

- Dual output voltage range selection
- Serial port programming
 - Current: 100% to 50% in each voltage range
 - Data log read: SKU, S/N, lot code, hours of operation, FW rev., fault events: power failure, transients (short or surge), thermal

Communication

- Bi-directional (dimming up and down and data log read)
- Bluetooth Mesh with wire whip antenna and external removable antenna

Avi-on Bluetooth Mesh Solution

- Wireless lighting controls with simple set-up that anyone can use
- Pre-integrated Bluetooth Smart + CSRMESH module enables brands to create multi-way controls and switching without additional wiring; no central gateway required
- Utility grade, secure, reliable mobile app & software
- Dimming, grouping, many users, schedules, timers
- Virtually unlimited range with mesh
- Download for free, additional services available
- Compatible with large ecosystem of products from major brands
- Avi-on battery-powered movable dimming switches available to complete the turnkey solution


Typical Applications

- Outdoor & Indoor
- Horticulture grow lights
- Street lights, Area lights
- Industrial high-bay lights




Nominal Input Voltage	Max. Output Power	Nominal Output Voltage	Max. Output Current	Efficiency	Max. Case Temperature	THD	Power Factor
120 & 277 Vac, 220–240 Vac	60 W	12, 24, 48 Vdc	5, 2.5, 1.25 A	up to 90% typical	90 °C (measured at the hot spot)	< 20%	> 0.9

Typical Application Diagram

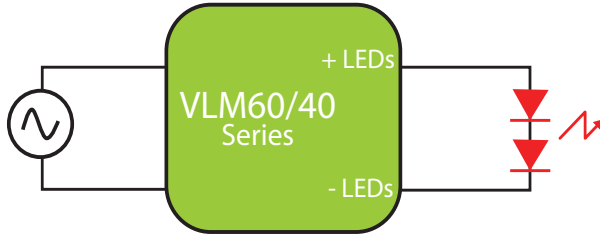

Models with Flying Leads,
Aluminum Case (VLMXXW Models)
L 130 x W 19.65 x H 19.8 mm
(L 5.12 x W 0.77 x H 0.78 in.)




Models with “-S” Suffix
Bottom Leads with Studs, Aluminum Case
L 130 x W 19.65 x H 23.85 mm
(L 5.12 x W 0.77 x H 0.94 in.)



Models with “-T” Suffix (Terminal Blocks)
Aluminum case
L 183.2 x W 19.9 x H 19.85 mm
(L 7.12 x W 0.78 x H 0.78 in.)



Features

- Very high power density of 20 W/in³
- Class 2 power supply
- Class II power supply per IEC 61347
- UL Class P
- IP20-rated case with silicone-based potting
- 90 °C maximum case hot spot temperature
- Lifetime: 50,000 hours min. at 70 °C case temperature
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements
- Worldwide safety approvals
- Additional safety approvals when using the optional strain reliefs for models with “-T” suffix 

ERP Part Number	Nominal Input Voltage (Vac)	Pout Max (W)	Vout Nom (Vdc)	Iout Max (A)
120 & 277 VAC NOMINAL INPUT VOLTAGE				
VLM40W				
VLM40W-12	120 & 277	40.0	12	3.3
VLM40W-24	120 & 277	40.0	24	1.67
VLM40W-48	120 & 277	40.0	48	0.83
VLM40W-12-S	120 & 277	40.0	12	3.3
VLM40W-24-S	120 & 277	40.0	24	1.67
VLM40W-48-S	120 & 277	40.0	48	0.83
VLM60W				
VLM60W-12	120 & 277	60.0	12	5
VLM60W-24	120 & 277	60.0	24	2.5
VLM60W-36	120 & 277	60.0	36	1.67
VLM60W-48	120 & 277	60.0	48	1.25
VLM60W-12-S	120 & 277	60.0	12	5
VLM60W-24-S	120 & 277	60.0	24	2.5
VLM60W-48-S	120 & 277	60.0	48	1.25
220–240 VAC NOMINAL INPUT VOLTAGE				
VLM40E				
VLM40E-12-T ⁽¹⁾	220–240	40.0	12	3.3
VLM40E-24-T ⁽¹⁾	220–240	40.0	24	1.67
VLM40E-48-T ⁽¹⁾	220–240	40.0	48	0.83
VLM60E				
VLM60E-12	220–240	60.0	12	5
VLM60E-24	220–240	60.0	24	2.5
VLM60E-48	220–240	60.0	48	1.25
VLM60E-12-T ⁽¹⁾	220–240	60.0	12	5
VLM60E-24-T ⁽¹⁾	220–240	60.0	24	2.5
VLM60E-48-T ⁽¹⁾	220–240	60.0	48	1.25

1. Strain reliefs for “-T” models can be ordered using part number SR1. Order quantity for SR1 is per strain relief, and 2 strain reliefs are needed for each driver.

Suffix for the different mounting options:

- NO suffix: side leads
- “-T”: Terminal blocks
- “-S”: Bottom lead exit with studs

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com


Typical Applications

- Strip lights
- Linear lighting
- Pendant lights
- Cove Lights




Nominal Input Voltage	Max. Output Power	Nominal Output Voltage	Max. Output Current	Efficiency	Max. Case Temperature	THD	Power Factor
120 & 277 Vac, 220–240 Vac	96 W	12, 24, 48 Vdc	8, 4, 2 A	up to 92% typical	90 °C (measured at the hot spot)	< 20%	> 0.9

Typical Application Diagram

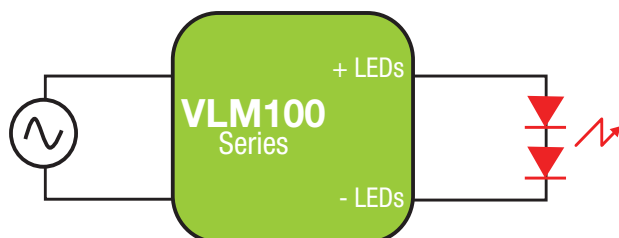

Models with Flying Leads,
Aluminum Case (VLM100W Models)
L 137 x W 26 x H 19.8 mm
(L 5.39 x W 1.02 x H 0.77 in.)




Models with “-S” Suffix
Bottom Leads with Studs, Aluminum Case
L 137 x W 26.0 x H 23.85 mm
(L 5.39 x W 1.02 x H 0.94 in.)



Models with “-T” Suffix (Terminal Blocks)
Aluminum case
L 193.2 x W 26.2 x H 19.85 mm
(L 7.60 x W 1.03 x H 0.78 in.)



Features

- Very high power density of 24 W/in³
- Class 2 power supply
- Class II power supply per IEC 61347
- IP20-rated case with silicone-based potting
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements
- 90 °C maximum case hot spot temperature
- Lifetime: 50,000 hours min. at 70 °C case temperature
- UL Class P
- Worldwide safety approvals
- Additional safety approvals when using the optional strain reliefs for models with “-T” suffix 

ERP Part Number	Nominal Input Voltage (Vac)	Pout Max (W)	Vout Nom (Vdc)	Iout Ma (A)
120 & 277 VAC NOMINAL INPUT VOLTAGE				
VLM100W				
VLM100W-12 ⁽¹⁾	120 & 277	96.0	12	8
VLM100W-24	120 & 277	96.0	24	4
VLM100W-36	120 & 277	96.0	36	2.7
VLM100W-48	120 & 277	96.0	48	2
VLM100W-12-S ⁽¹⁾	120 & 277	96.0	12	8
VLM100W-24-S	120 & 277	96.0	24	4
VLM100W-48-S	120 & 277	96.0	48	2
220–240 VAC NOMINAL INPUT VOLTAGE				
VLM100E				
VLM100E-12	220–240	96.0	12	8
VLM100E-24	220–240	96.0	24	4
VLM100E-48	220–240	96.0	48	2
VLM100E-12-T ⁽²⁾	220–240	96.0	12	8
VLM100E-24-T ⁽²⁾	220–240	96.0	24	4
VLM100E-48-T ⁽²⁾	220–240	96.0	48	2

1. VLM100W-12 is not Class 2 because the over-current protection of this model exceeds the 5A UL Class 2 limit.
2. Strain reliefs for “-T” models can be ordered using part number SR2. Order quantity for SR2 is per strain relief, and 2 strain reliefs are needed for each driver.

Suffix for the different mounting options:

- a) NO suffix: side leads
- b) “-T”: Terminal blocks
- c) “-S”: Bottom lead exit with studs

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com


Typical Applications

- Strip lights
- Linear lighting
- Pendant lights
- Cove Lights



Nominal Input Voltage	Max. Output Power	Nominal Output Voltage	Max. Output Current	Efficiency	Max. Case Temperature	THD	Power Factor
120 & 277 Vac	96 W	12, 24, 48 Vdc	5, 4, 2 A	up to 92% typical	90 °C (measured at the hot spot)	< 20%	> 0.9

Typical Application Diagram

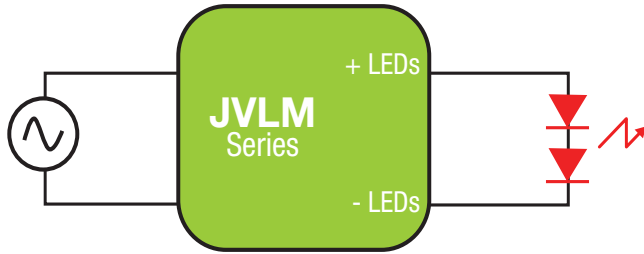


ERP Part Number	Nominal Input Voltage (Vac)	Pout Max (W)	Vout Nom (Vdc)	Iout Max (A)
JVLM60W: 60 W				
JVLM60W-12	120 & 277	60.0	12	5
JVLM60W-24	120 & 277	60.0	24	2.5
JVLM60W-48	120 & 277	60.0	48	1.3
JVLM100W: 100 W				
JVLM100W-24	120 & 277	96.0	24	4
JVLM100W-48	120 & 277	96.0	48	2

Models contain the VLM LED Driver in the aluminum case with flying leads.

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com



Dimensions
L 207.2 x W 75.4 x H 33 mm
(L 8.16 x W 2.97 x H 1.30 in.)

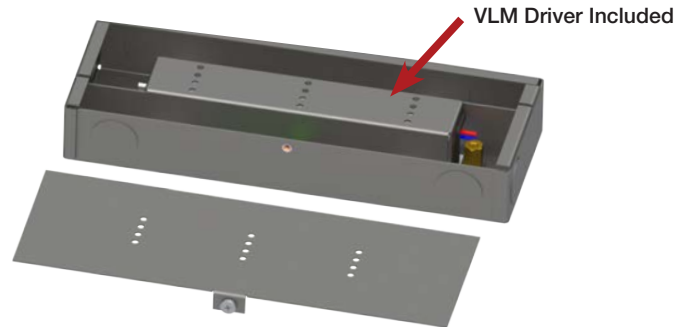

Typical Applications

- Strip lights
- Linear lighting
- Pendant lights
- Cove Lights




Features

- Low profile, rugged steel enclosure designed for use with our Constant Voltage VLM series
- JVLM is Plenum-rated, so it can go in air handling spaces. (In building construction, the plenum is the space that is used for air circulation in heating and air conditioning systems, typically between the structural ceiling and the suspended ceiling or under a raised floor).
- Designed for contractor installation:
 - UL listed
 - Separation of low-voltage wiring and high-voltage wiring
 - 4 mounting holes for surface mounting
 - 4 knockout holes for low-voltage wiring and 4 knockout holes for high-voltage wiring enable maximum wiring flexibility
- Same electrical features as the VLM series
- IP20-rated case
- Patent protected

Nominal Input Voltage	Max. Output Power	Nominal Output Voltage	Max. Output Current	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 & 277 Vac	90 W	24, 48 Vdc	3.75, 1.9 A	up to 90% typical	90 °C (measured at the hot spot)	< 20%	> 0.9	Programmable 0–10 V	1–100%	300 ms typical

Typical Application Diagram

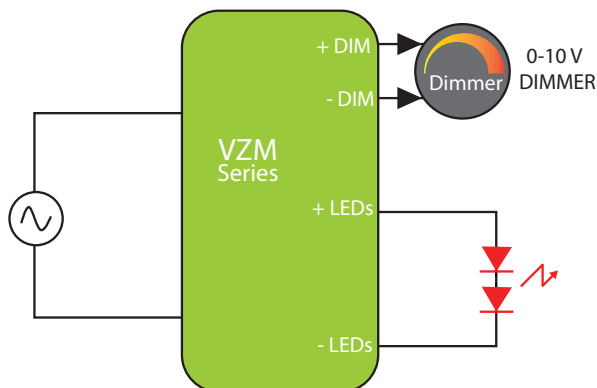

ERP Part Number	Nominal Input Voltage (Vac)	Pout Max (W)	Vout Nom (Vdc)	Iout Max (A)
VZM60W				
VZM060W-24 ⁽¹⁾	120 & 277	60.0	24	2.5
VZM060W-24-FN ⁽²⁾	120 & 277	60.0	24	2.5
VZM060W-48 ⁽¹⁾	120 & 277	60.0	48	1.25
VZM060W-48-FN ⁽²⁾	120 & 277	60.0	48	1.25
VZM100W				
VZM100W-24 ⁽¹⁾	120 & 277	90.0	24	3.75
VZM100W-24-FN ⁽²⁾	120 & 277	90.0	24	3.75
VZM100W-48 ⁽¹⁾	120 & 277	90.0	48	1.87
VZM100W-48-FN ⁽²⁾	120 & 277	90.0	48	1.87

Suffix for the different options:

1. NO suffix: Side leads, 0–10 V circuit isolation from DC output and AC input
2. "-FN": Side leads, 0–10 V circuit isolation from AC input

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com



Models with Flying Leads, Aluminum Case

VZM100

L 150.2 x W 38.8 x H 24.9 mm
(L 5.91 x W 1.53 x H 0.98 in.)

VZM060

L 148.7 x W 31.8 x H 22.4 mm
(L 5.85 x W 1.25 x H 0.88 in.)



NFC Programming


- Programmable output voltage for optimal dimming range
- Fully programmable 0–10 V dimming profile with dim-to-off

Features

- Class 2 power supply
- UL Class P
- Ripple ≤ 5% @ 20% & 100% load
- Constant voltage mode with over-current protection
- IP20-rated case with silicone-based potting
- 90 °C maximum case hot spot temperature
- Lifetime: 5 years minimum at 70 °C case temperature
- EMI: Compliant with FCC CFR Title 47 Part 15 Class B at 120 Vac & Class A at 277 Vac
- Surge protection:
 - IEC61000-4-5: 2 kV line to line / 2 kV line to earth
 - 2.5 kV ring wave: ANSI/IEEE c62.41.1-2002 & c62.41.2-2002 category A
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements

Nominal Input Voltage	Max. Output Power	Nominal Output Voltage	Max. Output Current	Efficiency	Max. Case Temperature	THD	Power Factor
120 & 277 Vac	260 W	24, 48 Vdc	10.8, 5.4 A	up to 93% typical	90 °C (measured at the hot spot)	< 20%	> 0.9

Typical Application Diagram

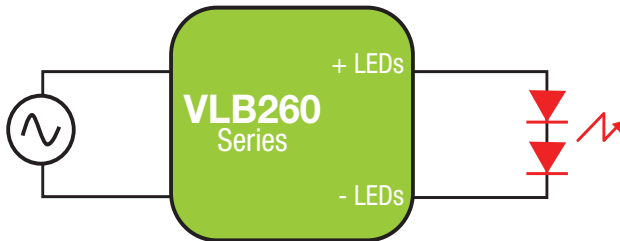

ERP Part Number	Nominal Input Voltage (Vac)	Pout Max (W)	Vout Nom (Vdc)	Iout Max (A)
VLB260W				
VLB260W-24	120 & 277	260.0	24	10.83
VLB260W-48	120 & 277	260.0	48	5.42

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com

Aluminum Case
L 214.4/240 x W 50.8 x H 38.5 mm
(L 8.44/9.47 x W 2 x H 1.52 in.)

Typical Applications

- Horticulture
- Industrial lights
- Outdoor and indoor




Features

- Very high power density of 10.2 W/in³
- UL Class P
- IP66-rated case with silicone-based potting
- 90 °C maximum case temperature
- Complies with ENERGY STAR® luminaire specification and DLC (DesignLight Consortium®) technical requirements

Nominal Input Voltage	Max. Output Power	Nominal Output Voltage	Max. Output Current	Efficiency	Max. Case Temperature	THD	Power Factor
120 & 277 Vac	90 W	12, 24 Vdc	5, 3.75 A	up to 85% typical	90 °C (measured at the hot spot)	< 20%	> 0.9

Typical Application Diagram

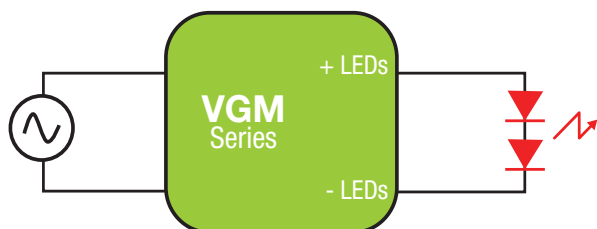

ERP Part Number	Nominal Input Voltage (Vac)	Pout Max (W)	Vout Nom (Vdc)	Iout Max (A)
VGM060W				
VGM060W-12	120 & 277	60.0	12	5
VGM100W				
VGM100W-24	120 & 277	90.0	24	3.75

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com



Typical Applications

- Signage
- Strip lights




Features

- Class 2 power supply
- IP66-rated case with silicone-based potting
- Lifetime: 50,000 hours min. at 50 °C ambient temperature
- UL879 SAM (Sign Component Manual) listing
- Surge protection:
 - IEC61000-4-5: 6 kV line to line / 6 kV line to earth
 - 2.5 kV ring wave: ANSI/IEEE c62.41.1-2002 & c62.41.2-2002 category A
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements




Nominal Input Voltage	Max. Output Power	Nominal Output Voltage	Max. Output Current	Efficiency	Max. Case Temperature	THD	Power Factor
120 & 277 Vac	90 W	12, 24 Vdc	5, 3.75 A	up to 90% typical	90 °C (measured at the hot spot)	< 20%	> 0.9

Typical Application Diagram

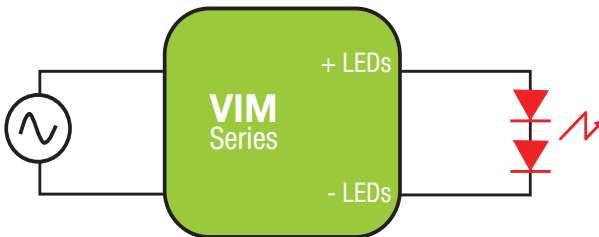

ERP Part Number	Nominal Input Voltage (Vac)	Pout Max (W)	Vout Nom (Vdc)	Iout Max (A)
VIM60W				
VIM060W-12	120 & 277	60.0	12	5
VIM100W				
VIM100W-24	120 & 277	90.0	24	3.75

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com

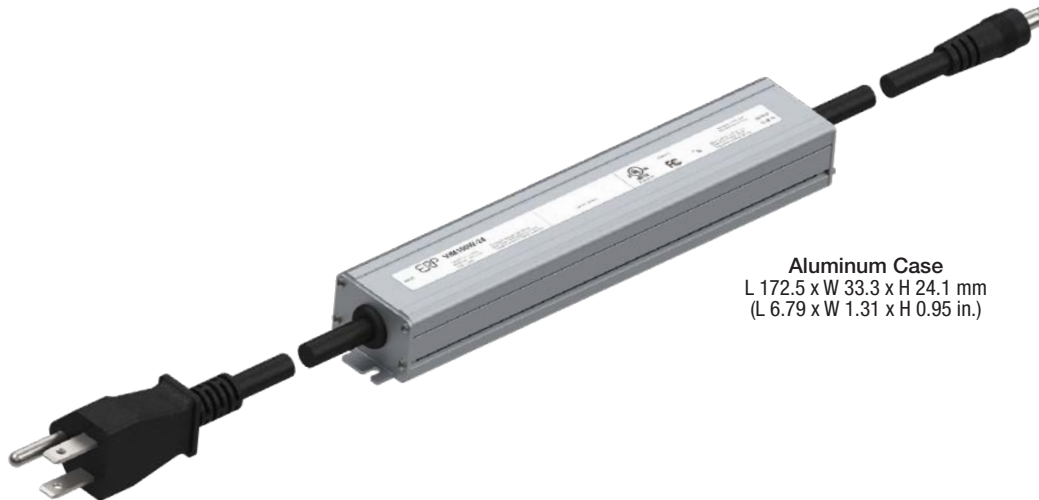

Aluminum Case
L 172.5 x W 33.3 x H 24.1 mm
(L 6.79 x W 1.31 x H 0.95 in.)



Features

- Class 2 power supply
- IP66-rated case with silicone-based potting
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements
- Lifetime: 50,000 hours min.


Typical Applications

- Signage
- Strip lights



Nominal Input Voltage	Max. Output Power	Output Voltage	Output Current Max	Efficiency	Max. Ambient Temperature	THD	Power Factor	Dimming Range	Startup Time
120 Vac	100 W	12, 24 V Constant Voltage	4.2 A	up to 91% typical	40 °C	< 20%	> 0.9	1–100% of light output	500 ms typical


Typical Application Diagram

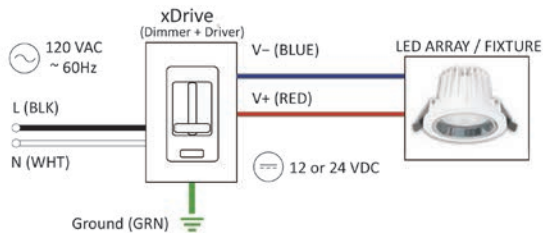

100 W: Metal Case & Metal Wall Plate
40 W & 60 W: Plastic Case & Metal Wall Plate

ERP Part Number	Nominal AC Line Voltage (Vac)	Pout Max (W)	Pout Min (W)	Vout Nom (V)	Iout Max (A)	Vout Regulation (Vdc)	Vout ripple (p-p)
VSW40U							
VSW40U-12-ERP	120	40.0	8.0	12	3.3	11.1 - 12.9 (+/-0.9 V)	< 10%
VSW60U							
VSW60U-12-ERP	120	60.0	10.0	12	5	11.1 - 12.9 (+/-0.9 V)	< 10%
VSW60U-24-ERP	120	60.0	3.0	24	2.5	22.2 - 25.8 (+/-1.8 V)	< 10%
VSW100U							
VSW100U-24-ERP	120	100.0	5.0	24	4.2	22.2 - 25.8 (+/-1.8 V)	< 10%

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com

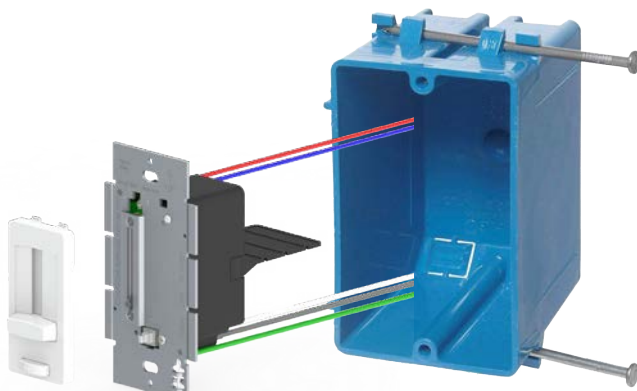


Features

- LED Driver + Dimmer in one physical unit
- Simplifies LED installation by eliminating compatibility issues between driver and dimmer
- Fits in a standard recessed electrical box (gang box)
- 100% - 1% smooth dimming
- Single pole preset dimmer with on/off push switch
- Adjustable voltage output dial to address voltage drop
- Includes voltage barrier partition to install high and low voltage circuit in same gang box
- No derating required when ganging units
- Power failure memory: If power is interrupted, xDrive will return to the setting prior to interruption.
- The Glossy White color is the default color for the face plate and the trim plate. Other colors (Glossy Light Almond, Glossy Dark Brown, and Glossy Black) are available but sold separately

Typical Applications

- Track lights
- Downlights
- Tape/Strip lights
- Under-cabinet lights

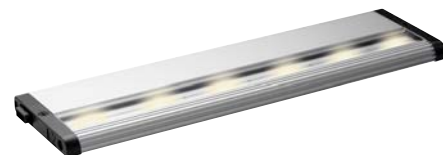

TWM2

UNIVERSAL AC INPUT TUNABLE WHITE LED MODULES



TWM2 (with Diffuser Lens)



TWM2 (without Diffuser Lens)

Araya® Universal AC Input Tunable White LED Modules (TWM) by ERP offer a wide CCT range from 1800 K to 6500 K, with dimming capability to 1%*. The non-linear tuning capability of TWM2 delivers its color quality (90+ CRI) with < 3 step MacAdam ellipse (SDCM) across its tuning range.

Two Warm Dim lamp profiles—MR16 halogen (3050–1800 K) and incandescent (2700–1800 K)—as well as twelve (12) ANSI CCT color points are pre-programmed into each engine.

The output of TWM can be controlled with a TRIAC or a 0–10 V dimmer, while its color can be dynamically and independently controlled with a second 0–10 V controller.

Araya TWM is a small yet powerful solution to all tunable white lighting applications.

COMMISSION AND CONTROL EFFORTLESSLY

Protocol	Dimming	CCT	Notes
0–10 V (CCT)	-	1800–6500 K	Operational CCT range can be adjusted/customized via the Araya Tunable White Bluetooth app.
0–10 V (DIM)	100–1%	-	1. Option to set Dim-Trim using the BLE app or the TWM Programming Tool. 2. Option to set Dim-Trim and/or to enable Dim-to-Off using the BLE app or the TWM Programming Tool*.
TRIAC	100–2%		
BLUETOOTH LE (Araya Tunable White 1.0)	100–1%	1800–6500 K	Use for commissioning, not for control. 1. Adjust maximum output level (set Dim-Trim). 2. Enable Dim-to-Off. 3. Customize the CCT range for Tunable White mode. 4. "Set and forget" the CCT for Selectable White Mode. 5. Select between Halogen and Incandescent profiles in Warm Dim Mode. 6. BLE option can be disabled via the TWM Programming Tool.
TWM Programming Tool	-	-	1. Adjust the maximum output level (set Dim-Trim) - FULL, 80%, 60%, 40%. 2. Enable Dim-To-Off. 3. Set to one of 12 selectable CCT points. 4. Select between Halogen and Incandescent Warm Dim profiles. 5. Disable Bluetooth capability on "-BT" devices.
TWM Selectable CCT Plugs	-	-	Select a plug to fix the CCT.


*Dim-to-Off is only available with 0–10 V operation.

Patents Pending.


THE TWM2 DATA TELLS THE STORY

TYPICAL LUMEN PERFORMANCE DATA

Typ. Lumen Output at Various CCT Points

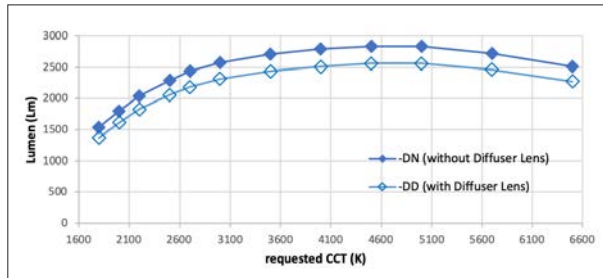


Typ. Efficacy (LPW) at Various CCT Points

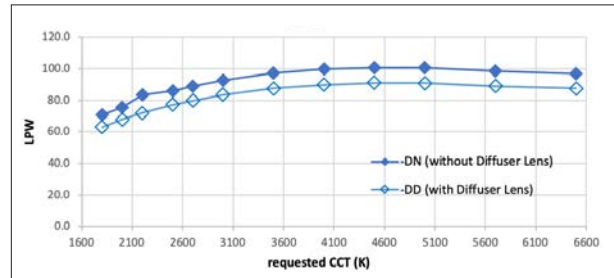


TYPICAL COLOR PERFORMANCE DATA

Spectral Power Data (SPD) at Various CCT Settings, with Diffuser Lens ("DD")

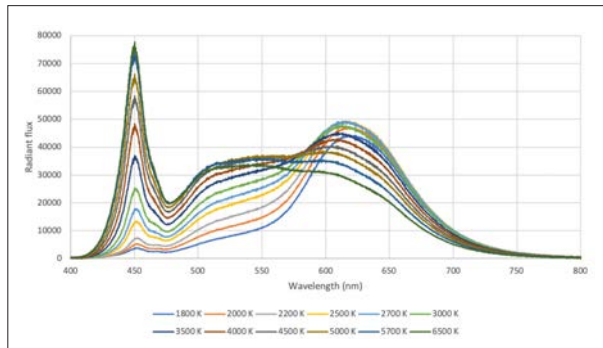


TM-30 Data - 3000 K

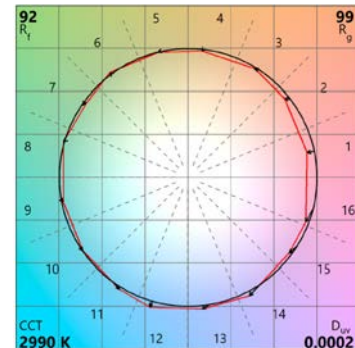


$R_f = 92$
 $R_g = 99$
 $D_{uv} = 0.0002$

COLOR SPACE DATA

CIE 1931 Color Space

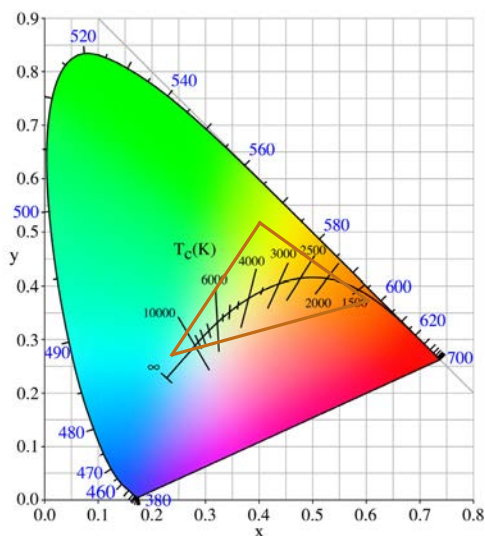

12 Selectable CCT Points in the CIE 1931 Color Space


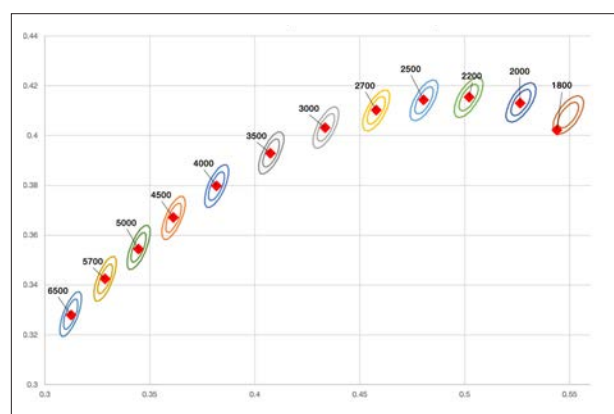


For additional color and performance data, please refer to www.erp-power.com. Specifications may be subject to change without notice.

araya[®] TUNABLE COLOR

COLOR IS HOW YOU LIGHT IT[®]

Araya recreates and controls light that emulates the spectral quality of daylight, and Araya accesses a rich gamut of pastels and saturated colors to unveil new design frontiers.

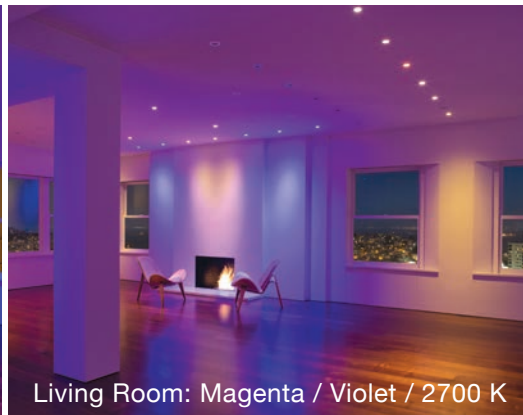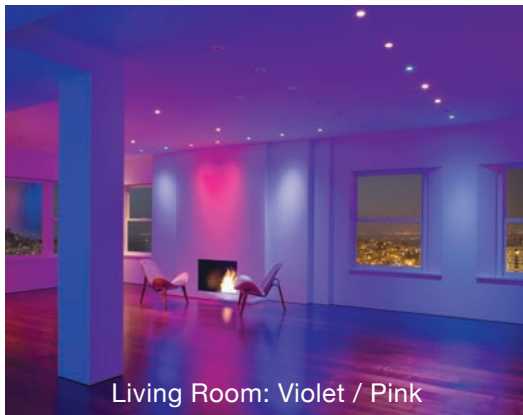


Private Residence in San Francisco. Fixtures by LF Illumination. DMX controls by Lutron[®]. Architect: Wesley Wei. Lighting Designer: Eve Quellman.

THE ARAYA BREAKTHROUGH

The replication and control of the range and beauty of daylight while ensuring color consistency from fixture-to-fixture over life, whether you use Tunable Color, Tunable White, LED Dimming or Halogen Dimming light paths. After all, **Color is How You Light It®**.





Spectral Quality of Daylight
90+ CRI



Saturated Green Option
Expanded Gamut


NATURAL DAYLIGHT EMULATION from sunrise through sunset—the light tracks the CIE Blackbody locus from 1650–4500 K and then smoothly transitions to the Daylight Curve to 8000 K.

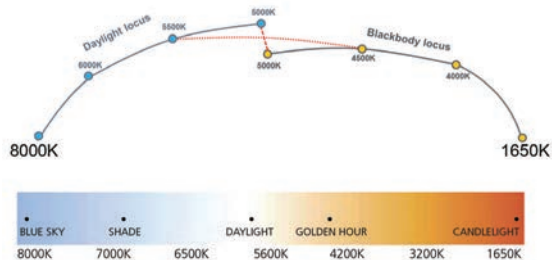

Color Access
Pastels to Saturates


FULL COLOR ACCESS to millions of colors within the gamut area created by the LEDs in the CIE color space, enabling tailored light from shades of pastels to saturates.

E-FLICKER FREE LED DIMMING TO 0.1%* is enabled by a proprietary hybrid technology that maintains color consistency while dimming.



Halogen Dimming
3050 K (100%) – 1800 K (1%)

TRADITIONAL DIMMING RECREATED by emulating a halogen lamp from 3050 K at full brightness to 1800 K at 1%.

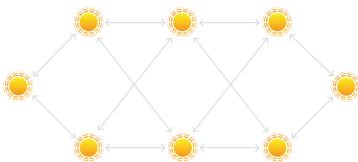


Color Consistency Over Life
Less than 2 SDCM


COLOR CONSISTENCY OF LESS THAN 2 MACADAM ELLIPSE OVER LIFE from fixture-to-fixture as verified by independent LM-84 testing—with on-board driver electronics and control logic for precise control of current and PWM.

THE DATA AND CONTROLS TELL THE STORY

TYPICAL SPD CURVE

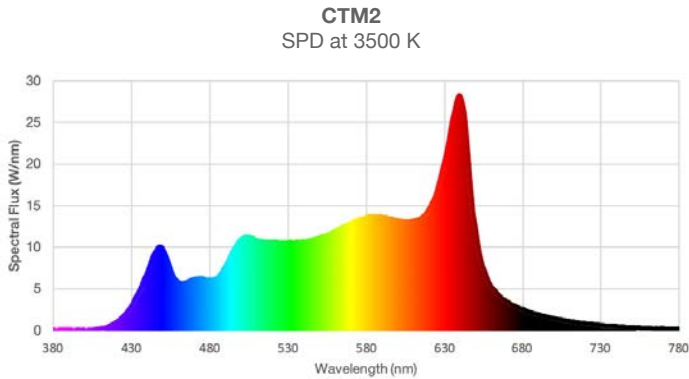

TYPICAL TM-30 DATA

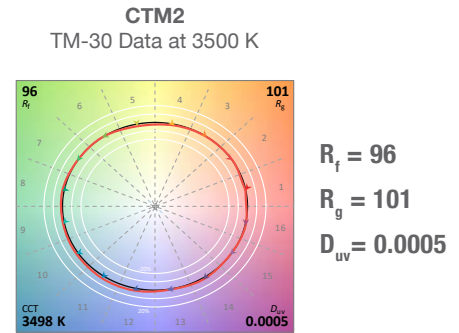

For additional color and performance information, please refer to www.erp-power.com.

COMMISSION AND CONTROL EFFORTLESSLY

DIGITAL - Araya is compatible with all industry-leading digital control systems.



Wattstopper® XICATO®



ANALOG - Two 0–10 V lines can be used to control Dimming and CCT independently, or program Scenes—in any combination of Dimming, CCT, Saturation and Hue—and recall them with five 0–10 V presets or the Araya iOS App.



iOS - Used in conjunction with Digital or Analog controls, each light engine can be wirelessly commissioned and then the radio turns off for enhanced security.

CONTROL SYSTEM / PROTOCOL	DIMMING (100–0.1%)*	CCT CTM1C - TUNABLE COLOR (1650–8000 K)	CCT CTM1C WI, CTM2, LTM2 - TUNABLE COLOR (1650–8000 K)	CCT DDM1C - WARM-DIM (1800–3050 K)	CCT DDM2 - WARM-DIM (1800–3050 K)	SAT	HUE
DMX512-A-RDM**	✓	✓	✓	✓	✓	✓	✓
0–10 V	~1%	✓	✓	✓	✓	***	***
LUTRON ECOSYSTEM**	✓	✓	✓	✓	✓	N/A	N/A
AVI-ON WIRELESS BLE MESH	✓	N/A	✓	N/A	✓	✓	✓
DALI TYPE 8	✓	✓	✓	✓	✓	N/A	N/A
WATTSTOPPER DLM	✓	✓	✓	✓	✓	N/A	N/A

*100–0.1% eFlicker-Free LED dimming is available for specific light engines when connected to 0.1% dimming-capable digital controls.


100–1% dimming is available with analog 0–10 V control and for Warm/Dynamic Dimming Modules (DDM).

**Refer to the separate DMX Lookup Tables or Lutron EcoSystem Lookup Tables for specific programming values and information.

***Two 0–10 V lines can be used to control Dimming and CCT independently, or program Scenes—in any combination of Dimming, CCT, Saturation and Hue—and recall them with five 0–10 V presets or the Araya iOS App.

Individual product specifications may vary; please refer to technical product data sheets. Bluetooth LE is provided on board for commissioning purposes only.


SAME GREAT FEATURES ACROSS ALL PRODUCT FAMILIES



Spectral Quality of Daylight
90+ CRI


Broad Tuning Range
1650–8000 K


Color Access
Pastels to Saturates


Halogen Dimming
3050 K (100%) – 1800 K (1%)


LED Dimming
100% – 0.1%*


Color Consistency Over Life
Less than 2 SDCM

COLOR TUNING LIGHT ENGINES



WARM/DYNAMIC DIMMING LIGHT ENGINES



	CTM1C	CTM1C WI	DDM1C
TUNABLE RANGE	1650–8000 K		3050–1800 K
PEAK DELIVERED LUMENS	750–2000	750–1000	480–1850
NOMINAL WATTAGE (W)	12–35	12–18	12–35
CRI ¹	90+		90+
COLOR GAMUT ACCESS	Yes		No
DIMMING THRESHOLD	0.1%*		1%
COLOR ACCURACY ¹	Less than 2 SDCM		Less than 2 SDCM
NOMINAL LES ² (mm)	9, 12, 19	19	9, 12, 19
DIAMETER (mm)	50	50	50
LINEAR ARRAY LENGTH (in)			
LINEAR CONNECTOR POSITION			
LINEAR LED POSITION			
CONTROL OPTIONS	DMX512-A-RDM 0–10 V Lutron® EcoSystem ³ DALI Type 8 ⁴ Wattstopper® DLM ⁵	Avi-on BLE Mesh ⁶	DMX512-A-RDM 0–10 V Lutron® EcoSystem ³ DALI Type 8 ⁵ Wattstopper® DLM ⁶

*0.1% eFlicker-Free / Hybrid LED dimming available for specific light engines, and only when connected to 0.1% dimming-capable digital controls.

Individual specifications may vary; please refer to technical product data sheets.

1. From 2000–6000 K, down to 5% dimming level.

2. Light Emitting Surface. 3. Requires external Digital Control Adapter. 4. On-board the light engine or via external Digital Control Adapter.

5. Requires external Wattstopper adapter. 6. Requires wireless interface BLE Mesh dongle/harness. 7. Requires optional control card.

SAME GREAT FEATURES ACROSS ALL PRODUCT FAMILIES



Spectral Quality of Daylight
90+ CRI



Broad Tuning Range
1650–8000 K



Color Access
Pastels to Saturates



Halogen Dimming
3050 K (100%) – 1800 K (1%)



LED Dimming
100% – 0.1%*



Color Consistency Over Life
Less than 2 SDCM

COLOR TUNING LIGHT ENGINES



WARM/DYNAMIC DIMMING LIGHT ENGINES



	CTM2	LTM2	DDM2
TUNABLE RANGE	1650–8000 K		3050–1800 K
PEAK DELIVERED LUMENS	990–9000	1000 lm/ft	480–1850
NOMINAL WATTAGE (W)	20–120	10 watts/ft	12–35
CRI¹	90+		90+
COLOR GAMUT ACCESS	Yes		No
DIMMING THRESHOLD	0.1%*		1%
COLOR ACCURACY¹	Less than 2 SDCM		Less than 2 SDCM
NOMINAL LES² (mm)	9, 12, 19, 32, 41		9, 12, 19
DIAMETER (mm)	40, 50, 60, 70		50
LINEAR ARRAY LENGTH (in)		11, 22, 24	
LINEAR ARRAY WIDTH (in)		24	
LINEAR CONNECTOR POSITION		Top or Bottom	
LINEAR LED POSITION		Symmetrical, Asymmetrical	
CONTROL OPTIONS	DMX512-A-RDM ⁷ 0–10 V Lutron® EcoSystem ⁷ Avi-on BLE Mesh ⁷ DALI Type 8 ⁷ Wattstopper® DLM ⁷	DMX512-A-RDM ⁷ 0–10 V Lutron® EcoSystem ⁷ Avi-on BLE Mesh ⁷ DALI Type 8 ⁷ Wattstopper® DLM ⁷	DMX512-A-RDM ⁷ 0–10 V Lutron® EcoSystem ⁷ Avi-on BLE Mesh ⁷ DALI Type 8 ⁷ Wattstopper® DLM ⁷


*0.1% eFlicker-Free / Hybrid LED dimming available for specific light engines, and only when connected to 0.1% dimming-capable digital controls.

Individual specifications may vary; please refer to technical product data sheets.

1. From 2000–6000 K, down to 5% dimming level.

2. Light Emitting Surface. 3. Requires external Digital Control Adapter. 4. On-board the light engine or via external Digital Control Adapter.

5. Requires external Wattstopper adapter. 6. Requires wireless interface BLE Mesh dongle/harness. 7. Requires optional control card.





U.S.A. Headquarters
Tel: +1-805-517-1300
893 Patriot Drive, Suite E
Moorpark, CA 93021

CHINA Operations
Tel: +86-756-6266298
No. 8 Pingdong Road 2
Zhuhai, Guangdong,
China 519060

www.erp-power.com
